

# Tehnološka uputstva za završno predmontažu dvodna i montažu na navozu

---

**Donadić, Dorian**

**Supplement / Prilog**

*Publication year / Godina izdavanja:* **2022**

*Permanent link / Trajna poveznica:* <https://um.nsk.hr/um:nbn:hr:190:331650>

*Rights / Prava:* [In copyright](#)/[Zaštićeno autorskim pravom.](#)

*Download date / Datum preuzimanja:* **2024-12-28**



*Repository / Repozitorij:*


[Repository of the University of Rijeka, Faculty of Engineering](#)



FAZA V

GR.3410, VT01 - 209,5 t

(sa opremom ~222 t)

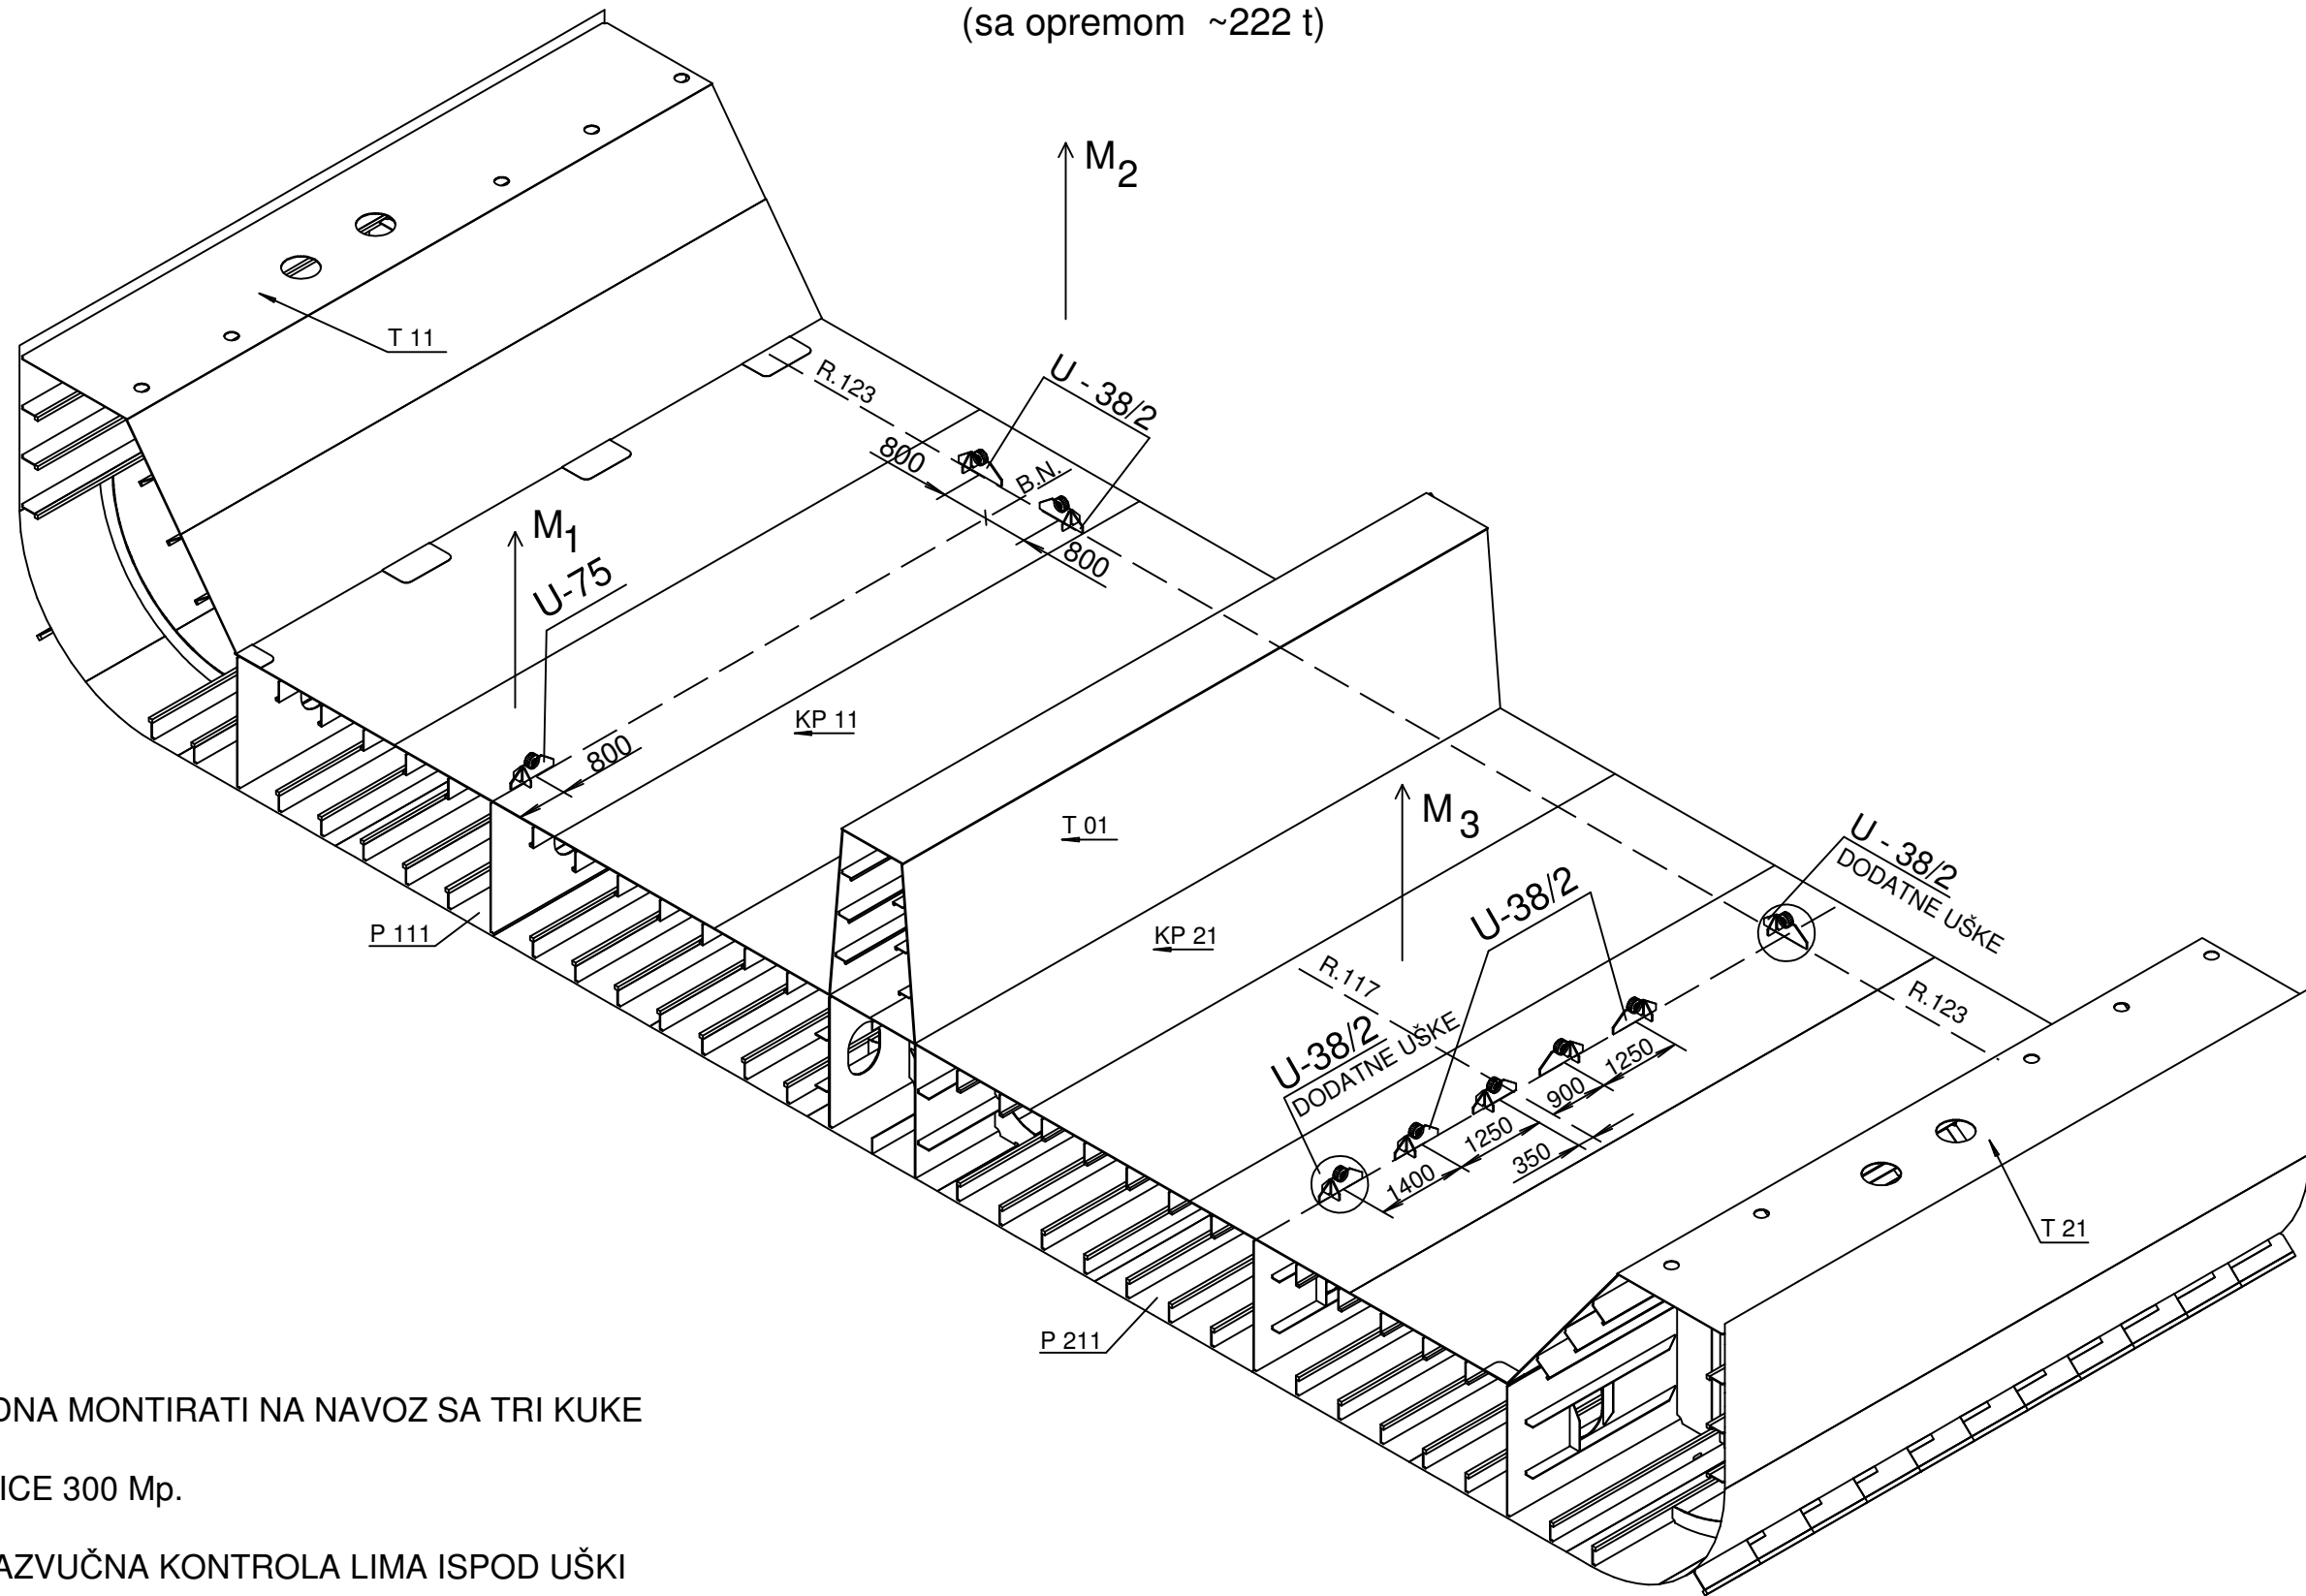

NAPOMENA:

- VT SEKCIJU DVODNA MONTIRATI NA NAVOZ SA TRI KUKE

M1, M2 I M3 DIZALICE 300 Mp.

- OBAVEZNA ULTRAZVUČNA KONTROLA LIMA ISPOD UŠKI

- STRUKTURU U PODRUČJU UŠKI ZAVARITI NA  $\triangle^6$

A3TEHNOL

P.N. 10710	NACRT BROJ: T-3633	LIST: LISTOVA:	TEZINA: 209529 TEZISTE X: FR118-83.0
SKLOP: <b>3410-VT01</b>			TEZISTE Y: -2
DATUM:			TEZISTE Z: 1694