

# PROCJENA STABILITETA I OTPORA 5-METARSKE JEDRILICE

---

**Bašić, Marija**

**Undergraduate thesis / Završni rad**

**2024**

*Degree Grantor / Ustanova koja je dodijelila akademski / stručni stupanj:* **University of Rijeka, Faculty of Engineering / Sveučilište u Rijeci, Tehnički fakultet**

*Permanent link / Trajna poveznica:* <https://um.nsk.hr/um:nbn:hr:190:148419>

*Rights / Prava:* [Attribution 4.0 International](#)/[Imenovanje 4.0 međunarodna](#)

*Download date / Datum preuzimanja:* **2024-11-27**



*Repository / Repozitorij:*

[Repository of the University of Rijeka, Faculty of Engineering](#)



SVEUČILIŠTE U RIJECI  
TEHNIČKI FAKULTET

Preddiplomski sveučilišni studij brodogradnje

Završni rad

**PROCJENA STABILITETA I OTPORA  
5-METARSKE JEDRILICE L5**

Rijeka, rujan 2024.

Marija Bašić

00690943838

SVEUČILIŠTE U RIJECI

**TEHNIČKI FAKULTET**

Preddiplomski sveučilišni studij brodogradnje

Završni rad

**PROCJENA STABILITETA I OTPORA**

**5-METARSKE JEDRILICE L5**

Mentor: prof. dr. sc. Anton Turk

Komentor: prof. dr. sc. Roko Dejhalla

Rijeka, rujan 2024

Marija Bašić

00690943838

Rijeka, 13.03.2024.

Zavod: Zavod za brodogradnju i inženjerstvo morske tehnologije  
Predmet: Plovnost i stabilitet broda

## ZADATAK ZA ZAVRŠNI RAD

Pristupnik: **Marija Bašić (0069094383)**  
Studij: Sveučilišni prijediplomski studij brodogradnje (1020)

Zadatak: **PROCJENA STABILITETA I OTPORA 5-METARSKE JEDRILICE / ASSESSMENT OF THE STABILITY AND RESISTANCE OF A 5-METRE SAILBOAT**

### Opis zadatka:

Na temelju postojećeg 3D modela 5-metarske jedrilice tipa L5, potrebno je: - odrediti hidrostatičke značajke trupa, - izraditi preliminarnu procjenu mase i težišta, - izraditi proračun stabiliteta prema EN ISO 12217-3:2017, - izraditi proračun otpora za odabrano stanje opterećenja.

Rad mora biti napisan prema Uputama za pisanja diplomskih / završnih radova koje su objavljene na mrežnim stranicama studija.

Zadatak uručen pristupniku: 20.03.2024.

Mentor:  
izv. prof. dr. sc. Anton Turk

Komentor:  
prof. dr. sc. Roko Dejhalla

Predsjednik povjerenstva za  
završni ispit:  
prof. dr. sc. Roko Dejhalla



## Izjava

Sukladno čl. 9 *Pravilnika o završnom radu , završnom ispitu i završetku sveučilišnih prijediplomskih studija* izjavljujem da sam samostalno izradila rad pod naslovom *Procjena stabiliteta i otpora 5-metarske jedrilice tipa L5*, konzultirajući se s mentorom i komentorom te primjenjujući znanja stečena tijekom prijediplomskog studija.

Rijeka, rujan 2024.

---

Marija Bašić

## ***Zahvala***

Želim se zahvaliti svom mentoru prof. dr. sc. Antonu Turku na savjetima i znanju prenesenom tijekom studija i tijekom izrade ovoga rada.

Želim se zahvaliti mojim roditeljima i sestri na beskrajnoj podršci, strpljenju i razumijevanju.

Najveće hvala mom komentoru prof. dr. sc. Roku Dejhalli.

Hvala Vam na svakoj kritici, svakom savjetu, izdvojenom vremenu i ogromnoj posvećenosti.

Hvala Vam na svakom održanom predavanju.

Hvala Vam što ste nam nesebično prenosili znanje i željeli da razumijemo.

Hvala Vam na svakom razgovoru koji se nije ticao otpora i propulzije, a značio mi je.

Profesore, hvala Vam na svemu.


# Sadržaj

1. Uvod.....	1
2. Opći podaci jedrilice.....	3
2.1 Procjena masa i težišta.....	3
3. Proračun stabiliteta prema EN ISO 12217-2017.....	7
3.1 Odabir opcije za proračun stabiliteta.....	7
3.2 Poluga stabiliteta.....	9
4. Određivanje hidrodinamičkih značajki trupa.....	11
4.1 Ulazni parametri.....	11
4.2 Metoda.....	13
4.3 Otpor trenja golog trupa na mirnoj vodi.....	13
4.4 Preostali otpor golog trupa.....	15
4.5 Promjena otpora u ovisnosti o nagibu.....	17
4.5.1 Promjena otpora trenja.....	17
4.5.2 Promjena preostalog otpora.....	19
4.6 Otpor privjesaka.....	22
4.6.1 Dodatak $R_v$ .....	22
4.6.2 Preostali otpor kobilice.....	24
4.6.3 Promjena otpora kobilice u ovisnosti o kutu nagiba.....	25
5. Zaključak.....	27
Literatura.....	28
Popis slika.....	29
Popis tablica.....	30
Sažetak.....	32
Prilozi.....	33


## 1. Uvod

Jedrilica je plovilo koje funkcioniše kroz dva medija: zrak i vodu. Trenutno postoji veliki broj različitih vrsta jedrilica koje se razlikuju po: veličini, namjeni, konstrukciji trupa, vrsti kobilice, rasporedu jedara i izboru jarbola. Upotrebljavajući relativno gibanje između vode i zraka jedrilica stvara silu koja je potrebna za njeno vlastito gibanje. Jedrilica mora biti u mogućnosti izdržati opterećenja koja nastaju zbog jedra i kobilice. Kobilica je temeljni element koji osigurava stabilnost plovila.


Ovaj rad se temelji na procjeni stabiliteta i otpora zadane jedrilice L5, slika 1. Procjena stabiliteta napravljena je prema normi EN ISO 12217:2017, uz pomoć propratnog alata *Rhinoceros 7*, koji je korišten za izradu digitalnog modela same forme (slika 1.1), te dodatka *Orca 3D* za dobivanje podataka o hidrostatičkim značajkama plovila. Proračun procjene otpora je izvršen za raspon brzina prema metodi „Delft Systematic Yacht Hull Series“, kako bi se prikazalo ponašanje zadane forme pri promjeni brzine.

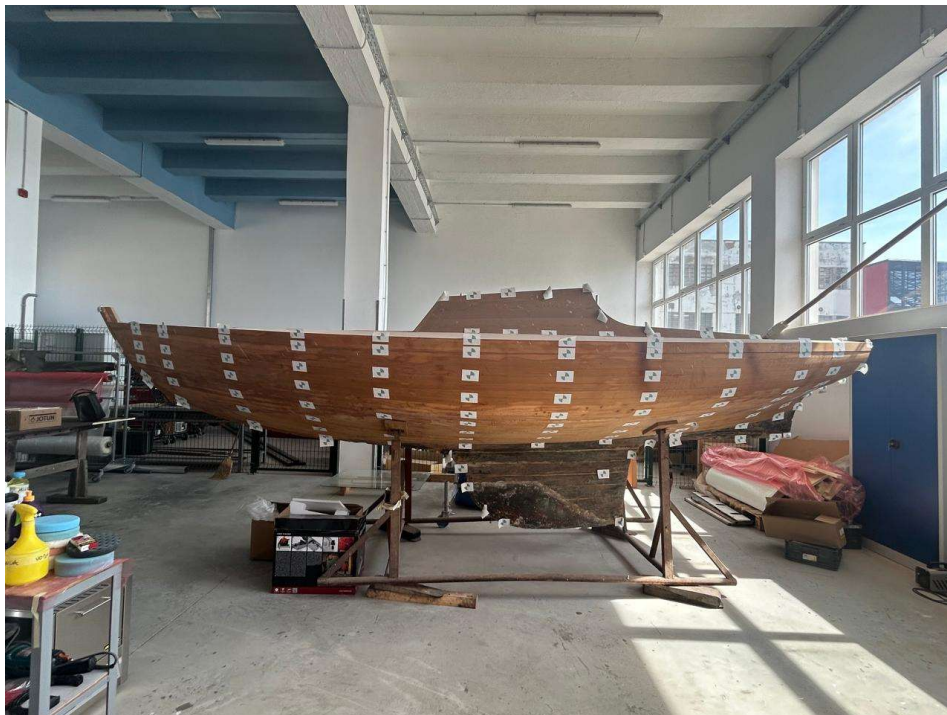

*Slika 1. Jedrilica L5-slikano u prostoru edukativne radionice „Torpedo“*

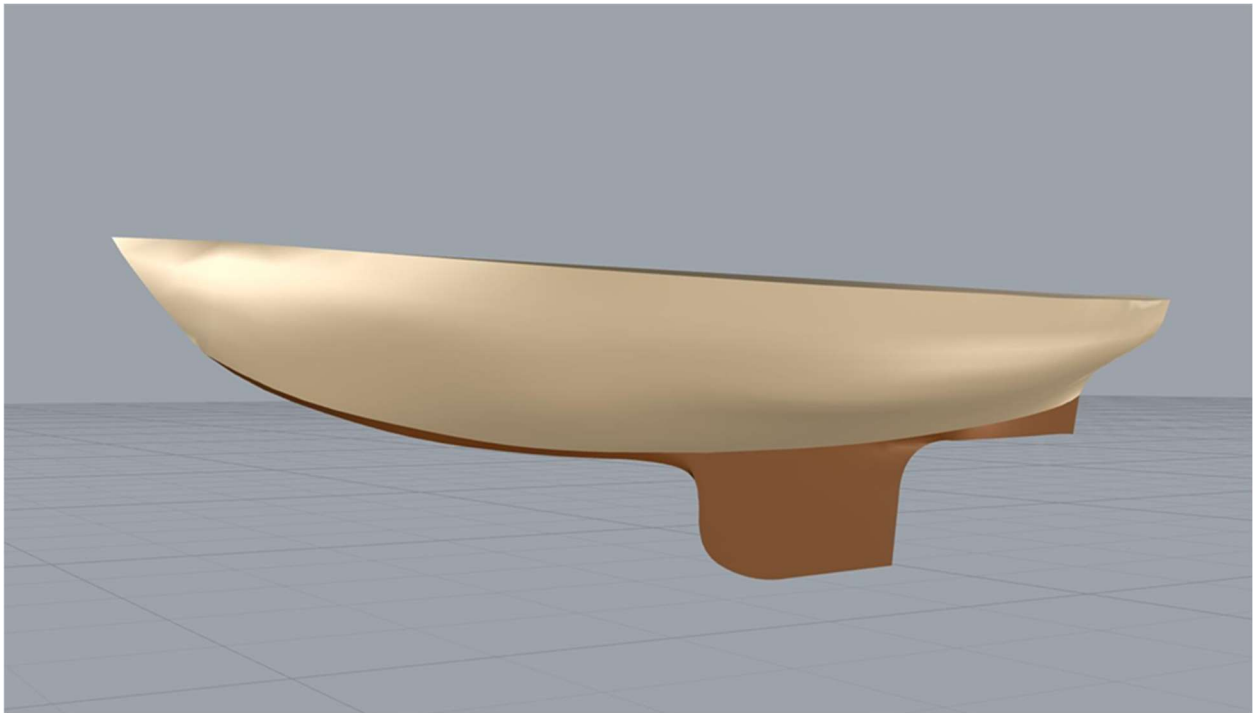

*Slika 1.1 Model jedrilice izrađen u programu Rhinoceros 7*

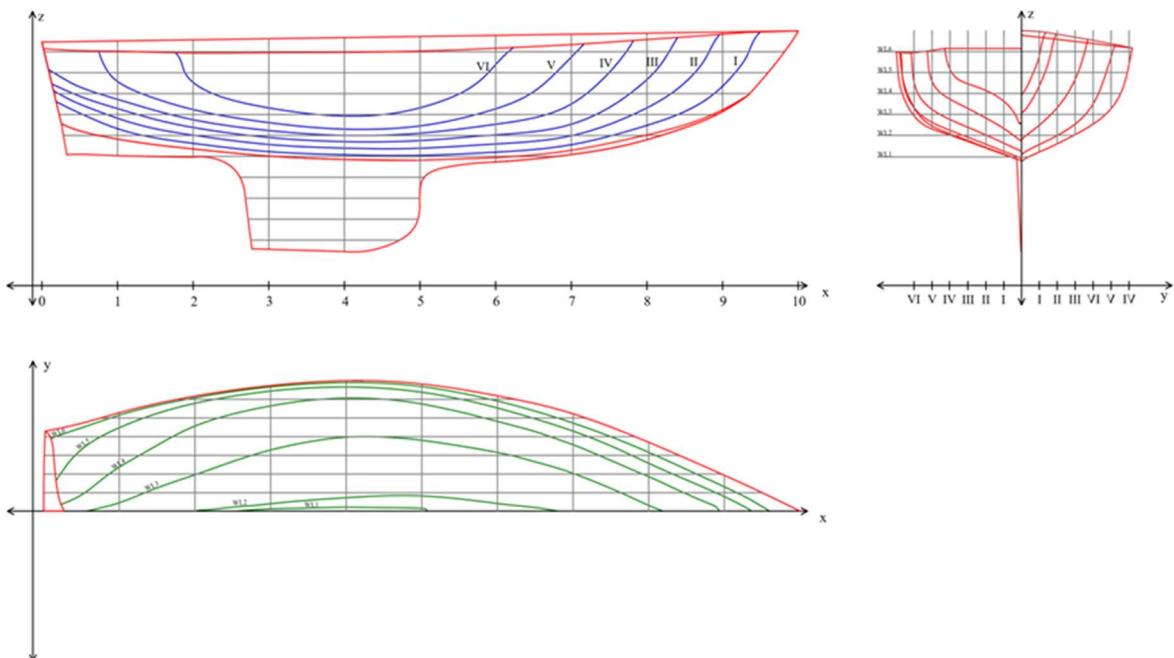

*Slika 1.2 Nacrt linija jedrilice klase L5*

## 2. Opći podaci jedrilice

U tablici 2. nalaze se relevantni podaci koji opisuju glavne karakteristike jedrilice tipa L5.

Dužina trupa $L_H$	=	6,17m
Širina trupa $B_H$	=	2,04m
Maksimalna širina trupa $B_{MAX}$	=	2,04m
Vrsta pogona	:	jedra
Površina jedra	=	21,9 m <sup>2</sup>
Maksimalna snaga pomoćnog motora	:	8 kW
Broj osoba	:	pet
Projektna kategorija	:	C

*Tablica 2. Glavne izmjere i opći podaci jedrilice*

### 2.1. Procjena masa i težišta

U tablici 2.1 prikazane su raspodjele masa za tri različita stanja opterećenja definirana prema normi ISSO 12217.

Masa praznog plovila  $m_{EC}$  = 910 kg

---

Trup = 500 kg

Jarbol i deblenjak = 54 kg

Oputa = 15 kg

Glavno jedro = 15 kg

Prednje jedro = 5 kg

Kobilica	=	315 kg
Kormilo	=	5 kg
<hr/>		
Standardna oprema	=	60 kg
(sidro, sidreno uže, lanac, izvanbrodski motor)		
<hr/>		
Masa praznog opremljenog plovila $m_{LC}$	=	970 kg
<hr/>		
Masa osoba	=	375 kg (5 osoba)
(masa jedne osobe 75kg)		
Provijant + osobne stvari	=	100 kg
Pitka Voda	=	0,0
Gorivo	=	18 kg
Izvanbrodski motor	=	40 kg
Zalihe, rezervni dijelovi	=	20 kg
Splav za spašavanje	=	35 kg
<hr/>		
Maksimalno opterećenje plovila	=	548 kg
<hr/>		
Masa maksimalnog opterećenog plovila $m_{LDC}$	=	1517 kg
<hr/>		
Masa plovila u stanju najmanjeg opterećenja $m_{MO}$	=	1090 kg
(uključena 1 osoba, oprema uobičajeno na plovilu, masa splava za spašavanje)		
<hr/>		
Masa koja se mora odbiti za plovilo u dolasku	=	20 kg
Masa plovila u dolasku $m_{LA}$	=	1497 kg
<hr/>		
Najveće opterećenje plovila	=	510 kg (za pločicu graditelja)

*Tablica 2.1 raspodjela masa za tri stanja opterećenja*

U tablicama 2.1.1, 2.1.2, 2.1.3 prikazan je izračun momenata masa za tri različita stanja opterećenja i koordinate težišta masa sustava za ista stanja opterećenja, prema normi ISO 12217.

<b>Raspodjela masa i koordinate težišta za maksimalno stanje opterećenja</b>										
	mi, kg	xi, m	yi, m	zi, m	mi*xi, kg*m	mi*yi, kg*m	mi*zi, kg*m			
trup	500,0	2,640	0,000	1,280	1320,000	0,000	640,000			
standardna oprema	20,0	5,000	0,000	1,500	100,000	0,000	30,000			
<b>Σ</b>	<b>520,0</b>				<b>1420,000</b>	<b>0,000</b>	<b>670,000</b>			
								xG, m	2,731	
								yG, m	0,000	
								zG, m	1,288	
Osobe #1	75,0	3,080	0,000	1,600	231,000	0,000	120,000			
#2	75,0	3,080	0,000	1,600	231,000	0,000	120,000			
#3	75,0	3,080	0,000	1,600	231,000	0,000	120,000			
#4	75,0	3,080	0,000	1,600	231,000	0,000	120,000			
#5	75,0	3,080	0,000	1,600	231,000	0,000	120,000			
Provijant + osobne stvari	100,0	3,000	0,000	0,900	300,000	0,000	90,000			
Tank goriva	18,0	5,500	0,000	1,200	99,000	0,000	21,600			
zalihe, rezervni djelovi	20,0	3,080	0,000	0,900	0,000	0,000	18,000			
jarbol i deblenjak	54,0	0,650	0,000	4,780	0,000	0,000	258,120			
oputa	15,0	4,000	0,000	5,000	0,000	0,000	75,000			
izvanbrodski motor	40,0	-0,300	0,000	1,400	-12,000	0,000	56,000			
glavno jedro	15,0	2,000	0,000	2,150	30,000	0,000	32,250			
prednje jedro	5,0	6,000	0,000	1,600	30,000	0,000	8,000			
kobilica	315,0	2,500	0,000	0,150	0,000	0,000	47,250			
splav	35,0	3,080	0,000	0,900	1,000	0,000	31,500			
kormilo	5,0	0,200	0,000	0,600	0,600	0,000	3,000			
<b>Σ</b>	<b>997,0</b>				<b>1603,600</b>	<b>0,000</b>	<b>1240,720</b>			
								xG, m	1,608	
								yG, m	0,000	
								zG, m	1,244	
<b>Σ Ukupno</b>	<b>1517,0</b>				<b>3023,600</b>	<b>0,000</b>	<b>1910,720</b>			
								LCG	xG, m	1,993
								TCG	yG, m	0,000
								VCG	zG, m	1,260

Tablica 2.1.1 Raspodjela masa i koordinate težišta za maksimalno stanje opterećenja




<b>Raspodjela masa i koordinate težišta za stanje opterećenja plovila u dolasku</b>									
	mi, kg	xi, m	yi, m	zi, m	mi*xi, kg*m	mi*yi, kg*m	mi*zi, kg*m		
trup	500,0	2,640	0,000	1,280	1320,000	0,000	640,000		
standardna oprema	20,0	5,000	0,000	1,500	100,000	0,000	30,000		
Σ	520,0				1420,000	0,000	670,000		
								xG, m	2,731
								yG, m	0,000
								zG, m	1,288
Osobe #1	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
#2	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
#3	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
#4	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
#5	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
Provijant + osobne stvari	100,0	3,000	0,000	0,900	300,000	0,000	90,000		
Tank goriva	18,0	5,500	0,000	1,200	99,000	0,000	21,600		
jarbol i deblenjak	54,0	0,650	0,000	4,780	0,000	0,000	258,120		
oputa	15,0	4,000	0,000	5,000	0,000	0,000	75,000		
izvanbrodski motor	40,0	-0,300	0,000	1,400	-12,000	0,000	56,000		
glavno jedro	15,0	2,000	0,000	2,150	30,000	0,000	32,250		
prednje jedro	5,0	6,000	0,000	1,600	30,000	0,000	8,000		
kobilica	315,0	2,500	0,000	0,150	0,000	0,000	47,250		
splav	35,0	3,080	0,000	0,900	1,000	0,000	31,500		
kormilo	5,0	0,200	0,000	0,600	0,600	0,000	3,000		
Σ	977,0				1603,600	0,000	1222,720		
								xG, m	1,641
								yG, m	0,000
								zG, m	1,252
<b>Σ Ukupno</b>	<b>1497,0</b>				<b>3023,600</b>	<b>0,000</b>	<b>1892,720</b>		
								LCG	xG, m
								TCG	yG, m
								VCG	zG, m
									1,264

Tablica 2.1.2 Raspodjela masa i koordinate težišta za stanje opterećenja plovila u dolasku

<b>Raspodjela masa i koordinate težišta za minimalno radno stanje</b>									
	mi, kg	xi, m	yi, m	zi, m	mi*xi, kg*m	mi*yi, kg*m	mi*zi, kg*m		
trup	500,0	2,640	0,000	1,280	1320,000	0,000	640,000		
standardna oprema	20,0	5,000	0,000	1,500	100,000	0,000	30,000		
Σ	520,0				1420,000	0,000	670,000		
								xG, m	2,731
								yG, m	0,000
								zG, m	1,288
Osobe #1	75,0	3,080	0,000	1,600	231,000	0,000	120,000		
Provijant + osobne stvari	10,0	3,000	0,000	0,900	30,000	0,000	9,000		
jarbol i deblenjak	54,0	0,650	0,000	4,780	0,000	0,000	258,120		
oputa	15,0	4,000	0,000	5,000	0,000	0,000	75,000		
izvanbrodski motor	40,0	-0,300	0,000	1,400	-12,000	0,000	56,000		
glavno jedro	15,0	2,000	0,000	2,150	30,000	0,000	32,250		
prednje jedro	5,0	6,000	0,000	1,600	30,000	0,000	8,000		
kobilica	315,0	2,500	0,000	0,150	0,000	0,000	47,250		
splav	35,0	3,080	0,000	0,900	1,000	0,000	31,500		
kormilo	5,0	0,200	0,000	0,600	0,600	0,000	3,000		
Σ	569,0				310,600	0,000	640,120		
								xG, m	0,546
								yG, m	0,000
								zG, m	1,125
<b>Σ Ukupno</b>	<b>1089,0</b>				<b>1730,600</b>	<b>0,000</b>	<b>1310,120</b>		
								LCG	xG, m
								TCG	yG, m
								VCG	zG, m
									1,203

Tablica 2.1.3 Raspodjela masa i koordinate težišta za minimalno radno stanje

Položaj vodnih linija za maksimalno opterećeno plovilo ( $m_{LDC} = 1517 \text{ kg}$ ), plovilo u dolasku ( $m_{LA} = 1497 \text{ kg}$ ) i plovilo u stanju minimalnog opterećenja ( $m_{MO} = 1090 \text{ kg}$ ) prikazan je na slici 2.2.

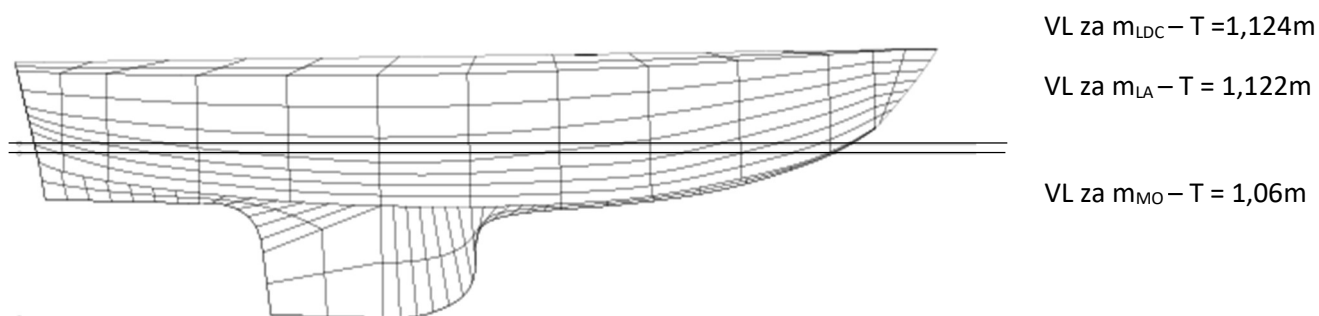

Slika 2.2 Položaj vodnih linija (VL) za masu istisnine od 1517 kg, 1497 kg i 1090 kg.

### 3. Proračun stabiliteta prema EN ISO 12217-2017

Proračun stabiliteta plovila napravljen je prema Sailing boats of hull length greater than or equal to 6m (EN ISO 12217-2017 small craft – Stability buoyancy assessment and categorization – Part 2). Popunjene tablice nalaze se u prilogu 1.


#### 3.1 Odabir opcije za proračun stabiliteta

Za provjeru stabiliteta odabrana je opcija 5 (EN ISO 12217-1, Tablica 2) koja je primjenjiva za:

- plovila C ili D kategorije
- bilo koja plovila osim onih kod kojih vodoravna projekcija linije razme obuhvaća bilo koju kombinaciju vodonepropusne palube, odnosno brzopraznećeg kokpita prema zahtjevima (EN ISO 11812:2018) Small craft-Watertight cockpits and quick-draining cockpits.

- Prema opciji pet potrebno je ispuniti:

- Radni list broj 3 („downflooding height“). Kao otvor za naplavlivanje utvrđena je visina pražnice kokpita na mjestu gdje se pražnica spaja s pramčanom palubicom, na lijevom i desnom boku plovila, slika 3.1.1. Minimalna visina otvora za naplavlivanje (EN ISO 12217-1, točka 6.1.2.2) iznad vodne linije maksimalno opterećenog plovila, određena je prema metodi iz EN ISO 12217-1, Fig. 2. i iznosi 0.736.

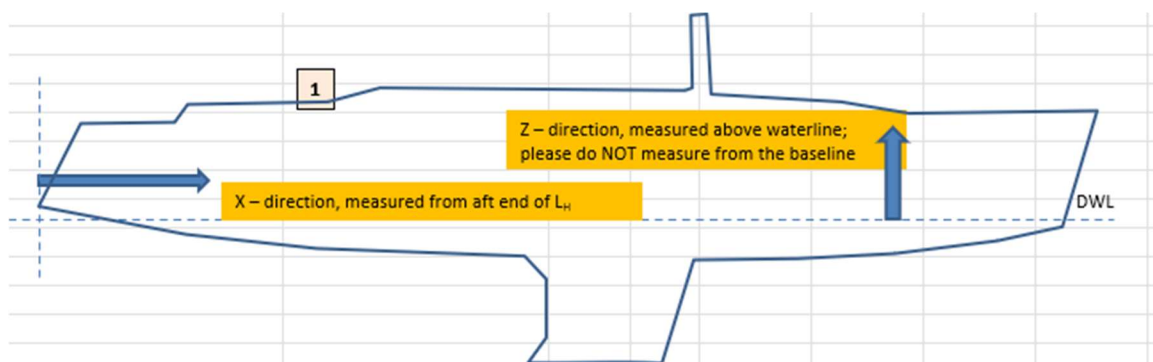


Slika 3.1.1. Visina  $h_d$ , visina otvora za naplavlivanje

- Radni list 9, („wind stiffness test“). Potrebno je ispuniti zahtjeve korištenjem teorijske metode, te se moraju ispuniti zahtjevi brzine vjetra za kategoriju C, tablica 7.

Wind speed in metres per second		
Design category	C	D
Option 5	13	8
Option 6	11	6

Tablica 7. prilog 1.

- Radni list 9a prikazuje odnos krivulje momenta nagiba zbog vjetra i momenta koji vraća jedrilicu u uspravni položaj, ove dvije krivulje se do kuta od 50 stupnjeva ne sijeku, slika 3.1.2

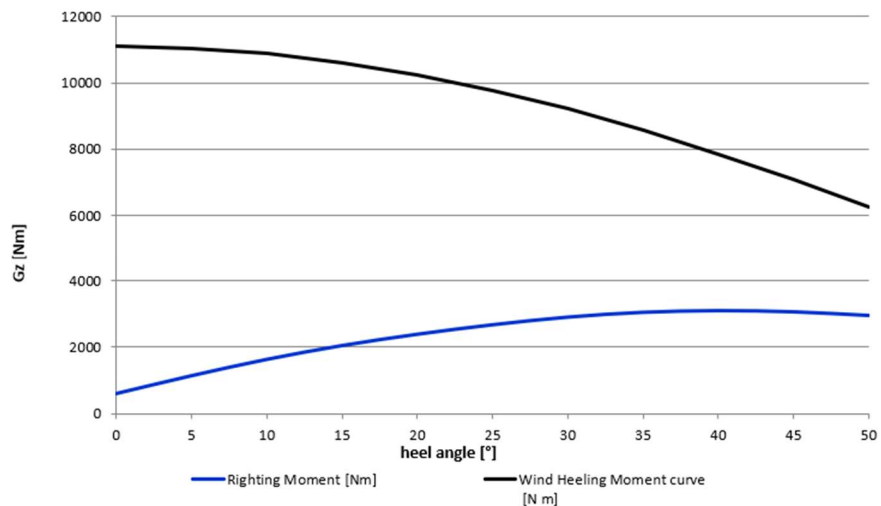


*Slika 3.1.2. Dijagram momenta nagiba zbog vjetra i momenta koji vraća jedrilicu u uspravan položaj*


U prilogu 1 nalazi se popunjeni tablični kalkulator sa svim unesenim veličinama i potvrdom zadovoljavanja kriterija.

### 3.2 Poluga stabiliteta


Poluge stabiliteta zadane forme za pojedine slučajeve opterećenja prikazane su na slikama: stanje punog opterećenja (slika 3.2.1), minimalnog radnog stanja (slika 3.2.2) i stanje plovila u dolasku (slika 3.2.3) dobivene su primjenom Orca 3D, unutar programskog paketa Rhinoceros 7.

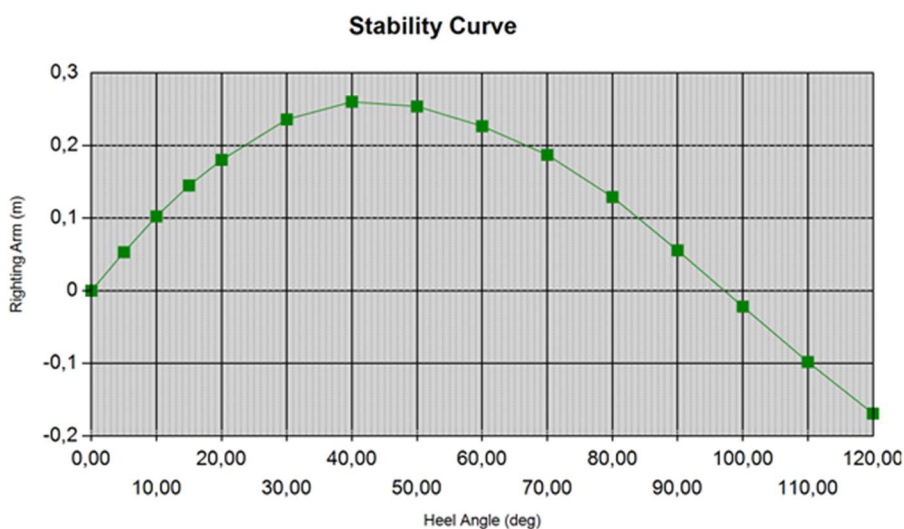

*Slika 3.2.1 Poluga stabiliteta za stanje punog opterećenja (engl. Loaded Displacement Condition)*

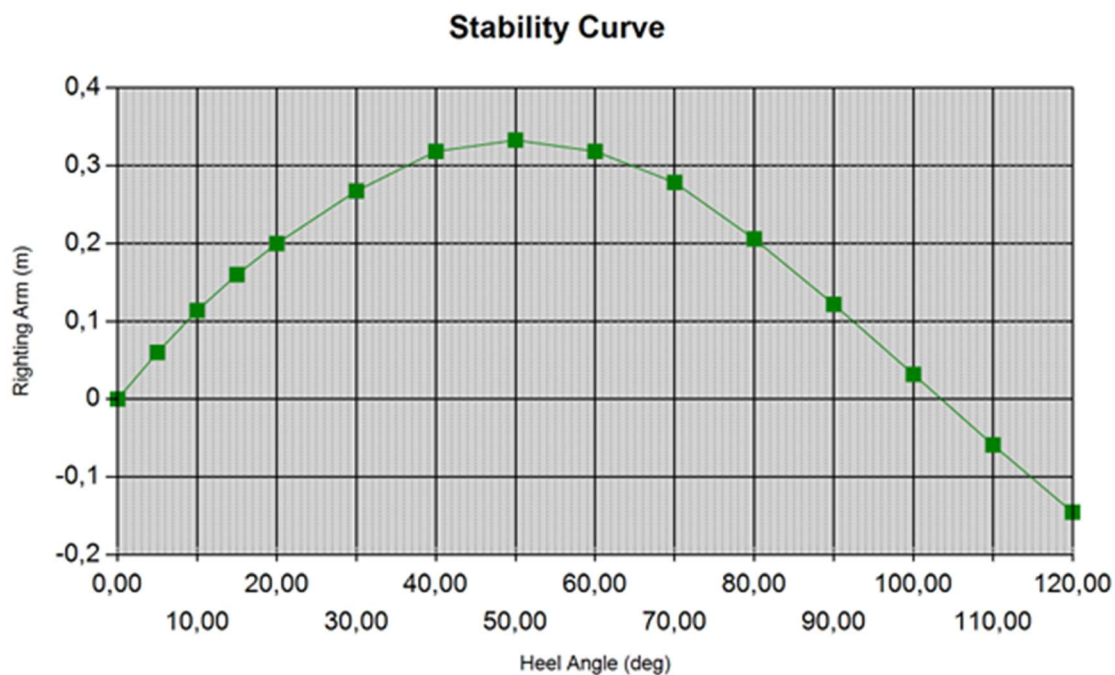

Slika 3.2.2 Poluga stabiliteta za minimalno radno stanje (engl. Minimum Operating Condition)

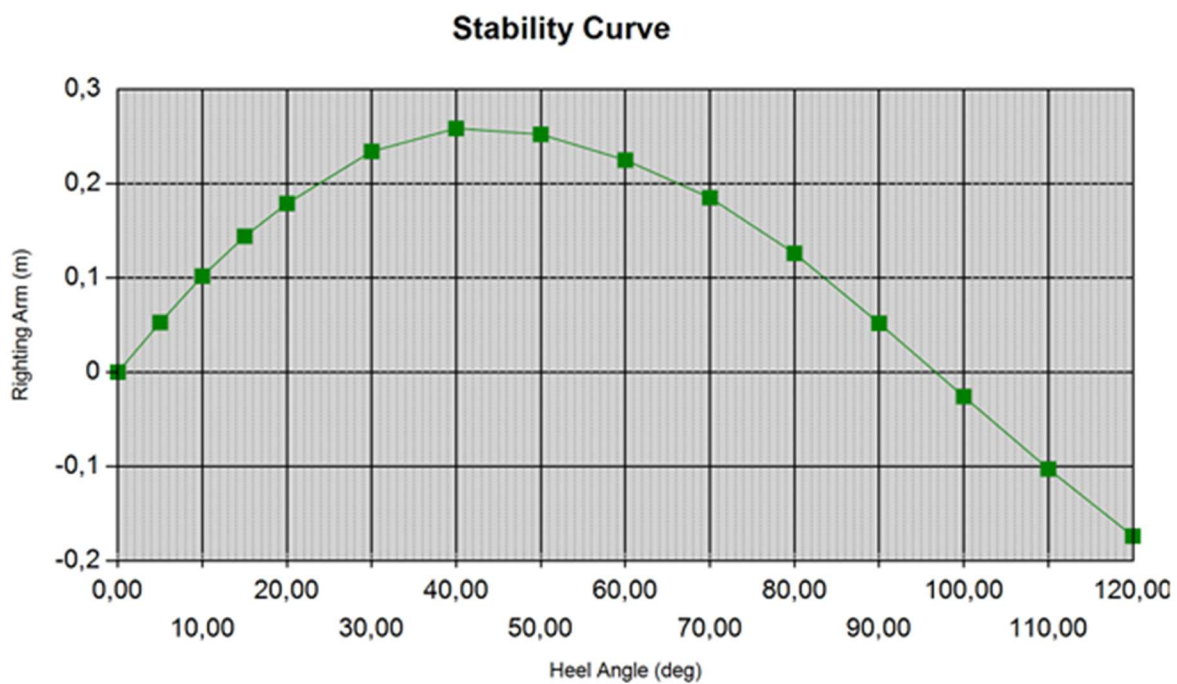

Slika 3.2.3 Poluga stabiliteta za stanje plovila u dolasku (engl. Loaded Arrival Condition)

## 4. Određivanje hidrodinamičkih značajki trupa

Za određivanje hidrodinamičkih značajki zadanog trupa korištena je metoda „Delft Systematic Yacht Hull Series“. Procjene otpora su izračunate za raspon brzina prema vrijednostima Froudovih brojeva zadanih u metodi. Raspon brzina primijenjen u proračunu zadan je u tablici 4.

Fn	V m/s
0,1	2,3154
0,15	2,8358
0,2	3,2745
0,25	3,6610
0,3	4,0105
0,35	4,3318
0,4	4,6309
0,45	4,9118
0,5	5,1775
0,55	5,4302
0,6	5,6717

Tablica 4. raspon brzina za proračun

### 4.1 Ulazni parametri

U tablici 4.1.1 nalazi se popis ulaznih podataka u metričkom sustavu.

Veličina	Simbol	
Dužina vodne linije	Lwl	5.467 m
Širina vodne linije	Bwl	1.838 m
Gaz golog trupa	Tc	0.364 m
Volumen istisnine golog trupa	Vc	1.421 m <sup>3</sup>
Uzdužni položaj težišta uzgona	LCB	2.611 m
Uzdužni položaj težišta vodne linije	LCF	2.619 m
Prizmatični koeficijent	Cp	0.546
Koeficijent glavnog rebra	Cm	0.72
Površina vodne linije	Awl	6.776 m <sup>2</sup>

Tablica 4.1.1. Ulazni podaci za proračun

U tablici 4.1.2 nalazi se popis raspona parametara trupa ispitanih u DSYHS-u. Izračunate vrijednosti za zadanu jedrilicu tipa L5 se nalaze unutar intervala određenih prema serijama ispitanih modela.

	Raspon parametara	Vrijednosti za L5
$\frac{Lwl}{Bwl}$	2.73 - 5.00	2.97
$\frac{Bwl}{Tc}$	2.46 - 19.38	5.049
$\frac{Lwl}{\nabla c^{\frac{1}{3}}}$	4.34 - 8.5	4.86
LCB	0% - (-8.2%)	-7.6%
LCF	-1.8% - (-9.5%)	-7.47%
Cp	0.52 - 0.6	0.546
Cm	0.65 - 0.78	0.72
$\frac{Aw}{\nabla c^{\frac{2}{3}}}$	3.78 - 12.67	5.36

*Tablica 4.1.2 Popis omjera veličina i raspona parametara prema DSYHS-u i za jedrilicu tipa L5*

## 4.2 Metoda

„Delft Systematic Yacht Hull Series“ (DSYHS) je opsežna metoda koja je testirala 50 modela i razvila jednadžbe koje se koriste kao aproksimativna metoda za procijenu najbitnijih sila koje djeluju na jedrilicu. Ovom metodom hidrodinamičke sile su rastavljene na zasebne komponente:

- Otpor golog trupa u uspravnom stanju  $R_{rh}$
- Otpor kobilice u uspravnom stanju  $R_{rk}$
- Otpor golog trupa sa nagibom  $R_{rh\varphi}$
- Otpor kobilice sa nagibom  $R_{rk\varphi}$

Ukupni otpor se računa kao zbroj otpora trenja golog trupa, preostalog otpora golog trupa, promjene otpora trenja golog trupa, promjene preostalog otpora, otpora trenja privjesaka, preostalog otpora privjesaka, dodataka za otpor zbog viskoznosti kod privjesaka i promjene preostalog otpora privjesaka. Ukupni otpor se računa prema jednadžbi:

$$R_{t\varphi} = R_{fh} + R_{rh} + \Delta R_{fh\varphi} + \Delta R_{rh\varphi} + R_{fk} + R_{rk} + R_v + \Delta R_{rk\varphi} \quad (4.20)$$

Izračun procjene otpora golog trupa u uspravnom stanju je početak proračuna, u ovom stanju se izračunavaju otpor trenja i preostali otpor. Zatim se određuju „delt“ otpora trenja i preostalog otpora koje su u funkciji kuta nagiba. Navede veličine su u proračunu izračunate za raspon brzina izračunatih kao funkcije raspona Froudovih brojeva zadanih u metodi.

## 4.3 Otpor trenja golog trupa na mirnoj vodi

Prepostavlja se potpuno turbulentno strujanje duž trupa. Pri izračunu Reynoldsovog broja uzima se 70% duljine vodne linije, a koeficijent otpora trenja se određuje metodom ITTC-57.

Korelacijska krivulja prema ITTC-u je definirana formulom:

$$C_f = \frac{0.075}{(\log(Rn) - 2)^2} = \frac{0.075}{(\log(9927853) - 2)^2} = 0.003 \quad (4.30)$$



Reynoldsov broj  $Rn$  se računa prema formuli:

$$Rn = \frac{V * 0.7 * Lwl}{\nu} \quad (4.31)$$

Kinematički viskozitet  $\nu$  i gustoća vode  $\rho$  se uzimaju za morsku vodu pri temperaturi od 15°C.

$$\nu = 1.18831 * 10^{-6} \text{ m}^2/\text{s}$$

$$\rho = 1025.9 \text{ kg/m}^3$$

Za određivanje otpora trenja  $Rfh$  koristi se izraz:

$$Rfh = \frac{1}{2} * \rho * V^2 * Sc * Cf \quad (4.32)$$

Uronjena površina golog trupa  $Sc$  se računa prema izrazu:


$$Sc = \left( 1.97 + 0.171 * \frac{Bwl}{Tc} \right) * \left( \frac{0.65}{Cm} \right) * (\nabla c * Lwl)^{\frac{1}{2}} = \quad (4.32)$$

$$\left( 1.97 + 0.171 * \frac{1.838}{0.364} \right) * \left( \frac{0.65}{0.72} \right) * (1.421 * 5.46)^{\frac{1}{2}} = 7,62 \text{ m}^2$$

Otpor trenja golog trupa u uspravnom stanju računa se za sve brzine koje su u funkciji Froudovih brojeva zadanih prema metodi, rezultati otpora se nalaze u tablici 4.3.1. Na slici 4.3.1 prikazan je dijagram otpora trenja  $Rfh$  za zadane brzine.

Fn	V	Rn	log Rn	Cf	Rfh
	m/s	/	/	/	N
0,1	2,315447161	277502,6	5,443267	0,006326	132,6991
0,15	2,835832035	339869,9	5,531313	0,006014	189,2467
0,2	3,274536778	392448	5,593782	0,005807	243,6329
0,25	3,661043415	438770,2	5,642237	0,005654	296,4921
0,3	4,010472125	480648,7	5,681828	0,005533	348,18
0,35	4,331804987	519159,9	5,715301	0,005433	398,9234
0,4	4,630894322	555005,3	5,744297	0,00535	448,8786
0,45	4,911805167	588672	5,769873	0,005277	498,1596
0,5	5,17749725	620514,7	5,792752	0,005214	546,853
0,55	5,430204927	650801,4	5,813448	0,005157	595,0267
0,6	5,671664071	679739,8	5,832343	0,005107	642,7352

Tablica 4.3.1 Izračunat Reynoldsov broj, bezdimenzijski koeficijent otpora trenja i otpor trenja za zadani raspon brzina

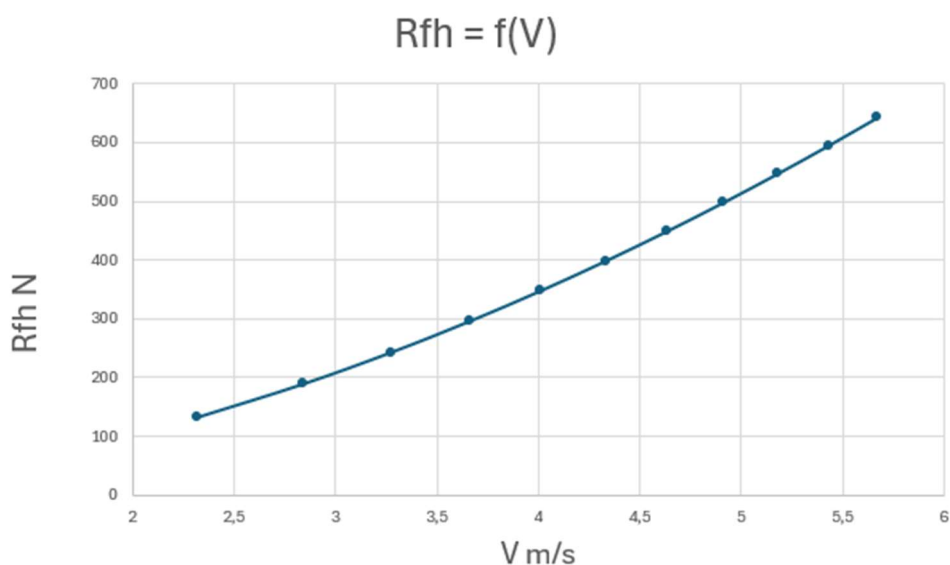

*Slika 4.3.1 Dijagram  $R_{fh}$  u funkcij raspona brzina*

#### 4.4 Preostali otpor golog trupa

Preostali otpor golog trupa  $R_{rh}$  određuje se prema jednadžbi:

$$\frac{R_{rh}}{\nabla c * \rho * g} = \left( a_0 + \left( a_1 * \frac{LCB_{fpp}}{Lwl} + a_3 * \frac{\nabla c^{\frac{2}{3}}}{Aw} + a_4 * \frac{Bwl}{Lwl} \right) * \frac{\nabla c^{\frac{1}{3}}}{Lwl} \right. \quad (4.40)$$

$$\left. + \left( a_5 * \frac{\nabla c}{Sc} + a_6 * \frac{LCB_{fpp}}{LCF_{fpp}} + a_7 * \left( \frac{LCB_{fpp}}{Lwl} \right)^2 + a_8 * Cp^2 \right) * \frac{\nabla c^{\frac{1}{3}}}{Lwl} \right)$$

Koeficijenti  $a$  ovog polinomskog izraza određeni su pri konstantnim brzinama i prikazani su za niz Froudeovih brojeva korištenjem metode najmanjeg kvadrata. Koeficijenti u ovisnosti o  $Fn$  su prikazani u tablici 4.4.1.

$F_n$	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.55	0.6
a0	-0,0014	0,0004	0,0014	0,0027	0,0056	0,0032	-0,0064	-0,0171	-0,0201	0,0495	0,0808
a1	0,0403	-0,1808	-0,1071	0,0463	-0,8005	-0,1011	2,3095	3,4017	7,1576	1,5618	-5,3233
a2	0,047	0,1793	0,0637	-0,1263	0,4891	-0,0813	-1,5152	-1,9862	-6,3304	-6,0661	-1,1513
a3	-0,0227	-0,0004	0,009	0,015	0,0269	-0,0382	0,0751	0,3242	0,5829	0,8641	0,9663
a4	-0,0119	0,0097	0,0153	0,0274	0,0519	0,032	-0,0858	-0,145	0,163	1,1702	1,6084
a5	0,0061	0,0118	0,0011	-0,0299	-0,0313	-0,1481	-0,5349	-0,8043	-0,3966	1,761	2,7459
a6	-0,0086	-0,0055	0,0012	0,011	0,0292	0,0837	0,1715	0,2952	0,5023	0,9176	0,8491
a7	-0,0307	0,1721	0,1021	-0,0595	0,7314	0,0223	-2,455	-3,5284	-7,1579	-2,1191	4,7129
a8	-0,0553	-0,1728	-0,0648	0,122	-0,3619	0,1587	1,1865	1,3575	5,2534	5,4281	1,1089


*Tablica 4.4.1 koeficijenti polinoma za preostali otpor golog trupa*

Izračunate vrijednosti polinomskog izraza u ovisnosti o Froudeovom broju su prikazane u tablici

4.4.2. Rezultati su grafički prikazani na dijagramu, slika 4.4.1

$F_n$	$R_{rh}$ (N)
0.1	-2.6059
0.15	2.7711
0.20	7.0292
0.25	18.1405
0.30	45.9277
0.35	105.446
0.40	276.609
0.45	615.374
0.50	1138.83
0.55	1791.45
0.60	2077.28

*Tablica 4.4.2 Izračunate vrijednosti otpora trenja  $R_{rh}$  u funkcije  $F_n$*

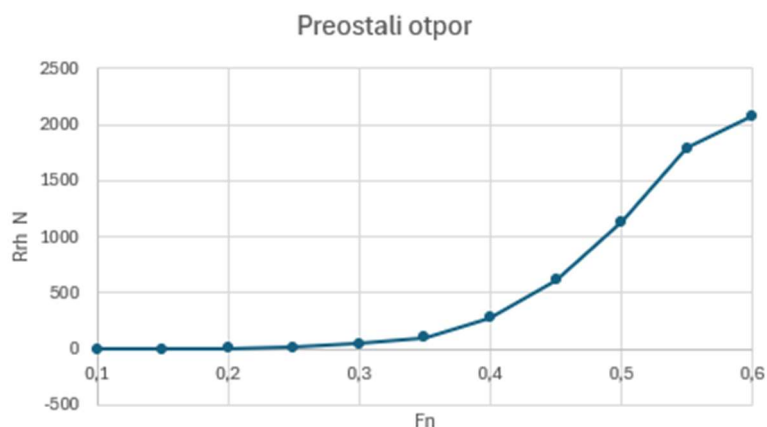

Slika 4.4.1 Dijagram preostalog otpora golog trupa  $R_{rh}$  u funkciji  $F_n$

## 4.5 Promjena otpora u ovisnosti o nagibu

Kada se jedrilica nagne dolazi do promjene u otporu. U realnim okolnostima nagib je uzrokovan silama na jedrima, što podrazumjeva sile uzgona na trup i privjeske. Da bi se inducirani otpor mogao izračunati računa se promjena otpora uzrokovana promjenom nagiba. Promjena otpora se računa zasebno za otpor trenja i preostali otpor.

### 4.5.1 Promjena otpora trenja

Promjena otpora trenja uzrokovanog promjenom nagiba je ovisna o promjeni uronjenog dijela trupa. Na temelju hidrostatičkih proračuna koji su provedeni za različite modele prema DSYHS-u promjena uronjenog dijela trupa može se aproksimirati s visokim stupnjem točnosti prema jednadžbi:

$$Sc_{\varphi} = Sc_{\varphi=0} * \left( 1 + \frac{1}{100} * (s_0 + s_1 * \frac{Bwl}{Tc} + s_2 * \left( \frac{Bwl}{Tc} \right)^2 + s_3 * Cm) \right) \quad (4.5.1)$$

U tablici 4.5.1.1 prikazane su vrijednosti koeficijenta polinomskog izraza za izračun promjene površine uronjenog dijela trupa.

$\phi$	5	10	15	20	25	30	35
s0	-4,112	-4,522	-3,291	1,85	6,51	12,334	14,648
s1	0,054	-0,132	-0,389	-1,2	-2,305	-3,911	-5,182
s2	-0,027	-0,077	-0,118	-0,109	-0,066	0,024	0,102
s3	6,329	8,738	8,949	5,364	3,443	1,767	3,497

*Tablica 4.5.1.1 koeficijenti polinoma za površinu uronjenog dijela trupa*

*u ovisnosti o nagibu*

Izračunate vrijednosti polinomskog izraza su prikazane u tablici 4.5.1.2

$S_c \phi$ (m <sup>2</sup> )	$\Phi$ °
7.5885	5
7.5622	10
7.4890	15
7.3893	20
7.2973	25
7.2060	30
7.1397	35

*Tablica 4.5.1.2 Vrijednosti površine uronjenog dijela trupa*

*ovisno o kutu nagiba*

Koristeći formulu za izračun otpora trenja (4.32) izračunate su vrijednosti za otpor trenja golog trupa za zadane kuteve. Dobijene vrijednosti su navedene u stablici 4.5.1.

V	Cf	Rfh φ5	Rfh φ10	Rfh φ15	Rfh φ20	Rfh φ25	Rfh φ 30	Rfh φ35
m/s		N	N	N	N	N	N	N
2,315447	0,00632586	132,014173	131,5566	130,28321	128,5488	126,9483	125,36	124,2066
2,835832	0,00601435	188,2698968	187,6174	185,801312	183,3278	181,0453	178,7801	177,1352
3,274537	0,00580708	242,3753779	241,5354	239,197365	236,013	233,0745	230,1584	228,0408
3,661043	0,0056536	294,9616577	293,9394	291,094136	287,2188	283,6428	280,0941	277,517
4,010472	0,00553266	346,3827948	345,1823	341,841042	337,2902	333,0908	328,9233	325,897
4,331805	0,00543342	396,8642622	395,4888	391,6606	386,4465	381,6351	376,8602	373,3929
4,630894	0,00534959	446,5615994	445,0139	440,706308	434,8392	429,4253	424,0526	420,151
4,911805	0,00527725	495,5882227	493,8706	489,090097	482,5789	476,5706	470,608	466,2781
5,177497	0,00521378	544,030282	542,1448	536,896987	529,7494	523,1537	516,6083	511,8552
5,430205	0,00515734	591,9553038	589,9037	584,193618	576,4163	569,2397	562,1177	556,9458
5,671664	0,00510661	639,4175525	637,2015	631,033544	622,6327	614,8806	607,1876	601,601

Tablica 4.5.1 Vrijednosti otpora trenja za zadane kuteve u funkciji raspona brzina

#### 4.5.2 Promjena preostalog otpora

Zbog asimetrije trupa uzrokovane nagibom dolazi do promjene u raspodjeli istisninskog volumena a time i preostalog otpora. Promjena preostalog otpora trupa zbog nagiba izvedena je iz mjerenja na nula i 20 stupnjeva nagiba, oduzimanjem od otpora u uspravnom stanju nagnuti otpor. Promjena preostalog otpora zbog nagiba određena je iz izmjerenih podataka i izračun je pretpostavljen polinomskom jednadžbom za  $\Delta Rrh$ .

Preostali otpor izmjeren na nagibu od 20 stupnjeva se računa po jednadžbi:

$$\frac{\Delta Rrh_{\varphi=20}}{Vc * \rho * g} = u_0 + u_1 * \frac{Lwl}{Bwl} + u_3 * \left(\frac{Bwl}{Tc}\right)^2 + u_4 * LCB + u_5 * LCB^2 \quad (4.5.2)$$

U tablici 4.5.1.3 prikazane su vrijednosti koeficijenta polinomskog izraza za izračun promjene preostalog otpora na nagibu od 20 stupnjeva u funkciji Froudovog broja.

Fn	0,25	0,3	0,35	0,4	0,45	0,5	0,55
u0	-0,0000268	0,0006628	0,0016533	-0,0008659	-0,0032715	-0,000198	0,00158
u1	-0,0000014	-0,0000632	-0,0002144	-0,0000354	0,0001372	-0,000148	-0,0004
u2	-0,0000057	-0,0000699	-0,000164	0,0002226	0,0005547	-0,000659	-0,0007
u3	0,0000016	0,0000069	0,0000199	0,0000188	0,0000268	0,000186	0,00021
u4	-0,000007	0,0000459	-0,000054	-0,00058	-0,0010064	-0,000749	-0,0005
u5	-0,0000017	-0,0000004	-0,0000268	-0,0001133	-0,0002026	-0,000165	-0,0001

*Tablica 4.5.1.3 koeficijenti za polinomski izraz promjene otpora trupa na nagibu od 20 stupnjeva*


Izračunate vrijednosti polinomskog izraza promjene otpora pri nagibu od 20 stupnjeva prikazane su u tablici 4.5.1.4.

Fn	$\Delta R_{rh} \varphi 20$ (N)
0.25	-0.70924
0.30	5.9663
0.35	5.1783
0.40	-24.4945
0.45	-49.9266
0.50	-34.0046
0.50	3.38756


*Tablica 4.5.1.4 Promjena preostalog otpora pri kutu od 20° u funkciji Froudovog broja*

Promjena preostalog otpora pri nagibu od 20 stupnjeva grafički je prikazana na dijagramu, slika 4.5.2.

Na slici 4.5.3 prikazan je dijagram preostalog otpora pri nagibu od 20 stupnjeva, krivulja je prikazana u funkciji Froudovog broja.

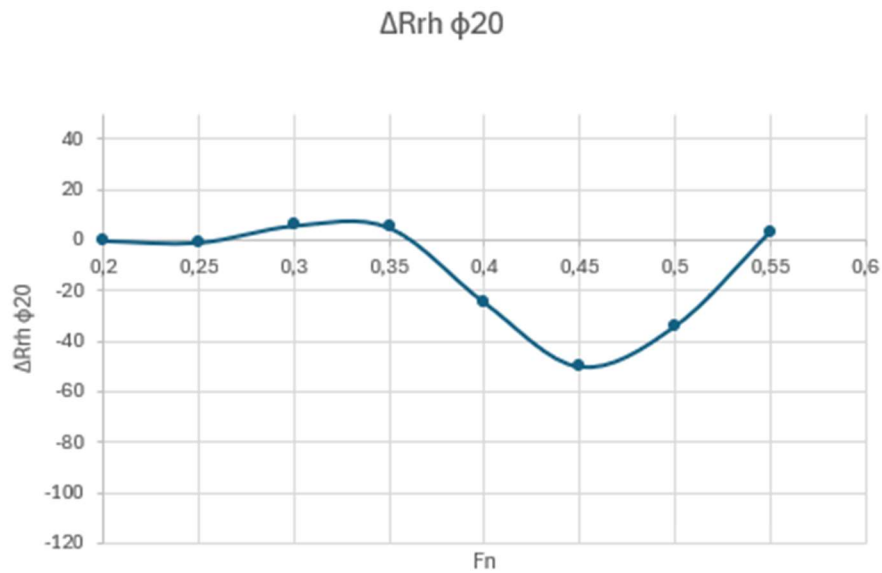

Slika 4.5.2 Dijagram promjene preostalog otpora pri kutu od od 20° u funkciji Froudovog broja

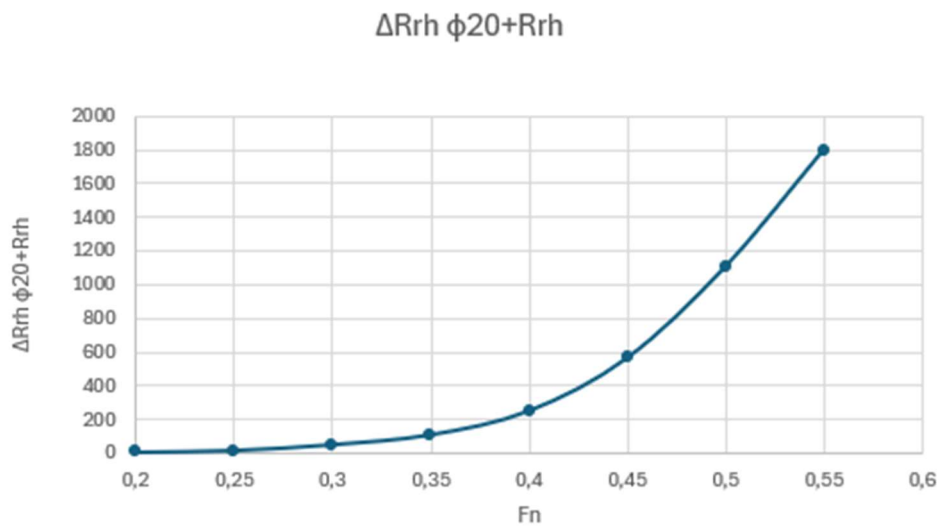

Slika 4.5.3 Dijagram preostalog otpora pri kutu od od 20° u funkciji Froudovog broja

Promjena otpora ovisno o bilo kom kutu se računa kao ekvivalent kuta nagiba na potenciji 1.7. Kut nagiba se računa u radijanima.

$$\Delta Rrh_{\varphi} = \Delta Rrh_{\varphi=20} + 6.0 * \varphi^{1.7} \quad (4.5.3)$$



## 4.6 Otpor privjesaka

Otpor golog trupa i privjesaka izračunati su zasebno. Utvrđeno je da otpor zbog viskoznosti privjesaka ne ovisi o kutu nagiba. Na temelju DSYHS eksperimenata sa sustavnim varijacijama kobilice ispod trupova različite forme zaključeno je da je preostali otpor privjesaka značajno pod utjecajem prisutnosti slobodne površine i zbog toga ovisi o nagibu. Prvo se određuje preostali otpor privjesaka u uspravnom stanju, a nakon toga promjena otpora zbog kuta nagiba.

### 4.6.1 Dodatak $R_v$

Dodatak za otpor zbog viskoznosti smatra se zbrojem otpora trenja i „drugih“ viskoznih učinaka koji se obračunavaju uvođenjem faktora forme.

$$R_v = R_f * (1 + k) \quad (4.6.1)$$

Otpor trenja  $R_f$  se računa pomoću izraza:

$$R_f = \frac{1}{2} * \rho * V^2 * S * C_f \quad (4.32)$$

Površina kobilice iznosi 2.436 m<sup>2</sup>

Za izračun faktora forme (1+k) koristi se Hoernerova formulacija „Fluid Dynamic Drag“, koja faktor oblika određuje kao funkciju relativne debljine presjeka.

$$(1 + k) = \left( 1 + 2 * \frac{t}{c} + 60 * \left( \frac{t}{c} \right)^4 \right) = (1 + 2 * 15 + 60 * 0.15^4) = 1.33 \quad (4.6.1.1)$$

Glavni parametri kobilice iz DSYHS-ovih standarda za izabrani Model 1 su zadani u tablici 4.6

AR – 0.65
TR – 0.63
$\Lambda$ – 45
t/c – 0.15


Tablica 4.6 glavni parametri kobilice izabranog Modela 1

U tablici 4.6.1. su navedene izračunate vrijednosti dodatka za otpor na kobilici zbog viskoznosti, vrijednosti su izračunate za raspon brzina prema zadanim Froudovim brojevima.

$F_n$	$V$	$R_n$	$\log R_n$	$C_f$	$R_{fh}$	$R_v$
	m/s	/	/	/	N	N
0,1	2,31545	277503	5,44327	0,00633	42,3781	55,0916
0,15	2,83583	339870	5,53131	0,00601	60,4369	78,568
0,2	3,27454	392448	5,59378	0,00581	77,8054	101,147
0,25	3,66104	438770	5,64224	0,00565	94,6862	123,092
0,3	4,01047	480649	5,68183	0,00553	111,193	144,551
0,35	4,3318	519160	5,7153	0,00543	127,398	165,618
0,4	4,63089	555005	5,7443	0,00535	143,352	186,357
0,45	4,91181	588672	5,76987	0,00528	159,09	206,817
0,5	5,1775	620515	5,79275	0,00521	174,64	227,032
0,55	5,4302	650801	5,81345	0,00516	190,025	247,032
0,6	5,67166	679740	5,83234	0,00511	205,261	266,839

Tablica 4.6.1 Dodatak za otpor za zadane brzine

Dijagram koji prikazuje krivulju dodatka za otpor u funkciji brzine prikazan je na slici 4.6.1

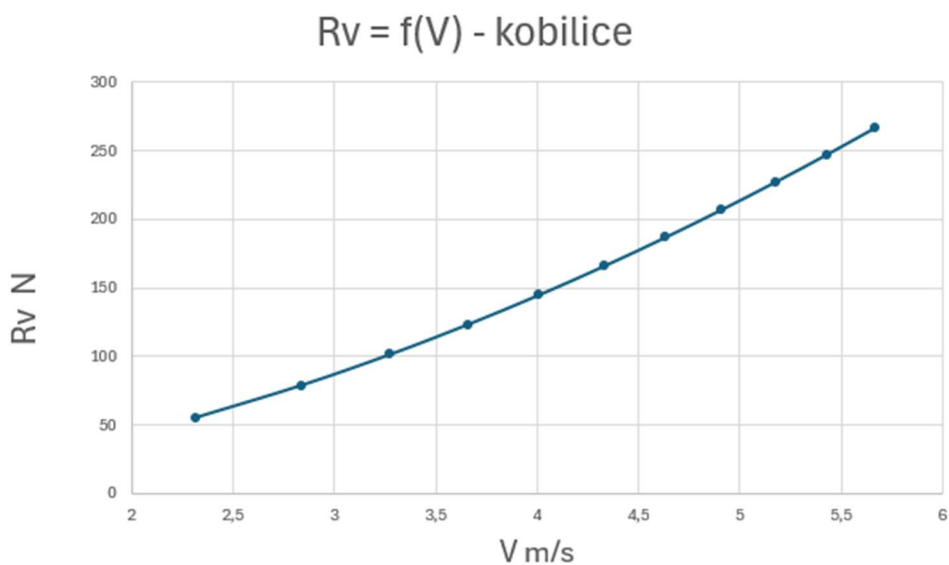

Slika 4.6.1. Dijagram dodatka za otpor u funkciji brzina

## 4.6.2 Preostali otpor kobilice

Preostali otpor  $R_{rk}$  se izračunava pomoću izraza:

$$\frac{R_{rk}}{\nabla k * \rho * g} = A_0 + A_1 * \frac{T}{Bwl} + A_2 * \frac{Tc + Z_{cbk}}{\nabla k^{\frac{1}{3}}} + A_4 * \frac{\nabla c}{\nabla k} \quad (4.6.2)$$

$\nabla k$  – uronjeni volumen kobilice  $m^3$

$T$  – ukupan gaz  $m$

$Z_{cbk}$  – vertikalna pozicija centra uzgona kobilice  $m$

U tablici 4.6.2.1 su prikazani koeficijenti polinomskog izraza za izračun preostalog otpora kobilice.

$F_n$	0,2	0,25	0,3	0,35	0,4	0,45	0,5	0,55	0,6
A0	-0,001	-0,0055	-0,0111	-0,0071	-0,03581	-0,0047	0,00553	0,04822	0,01021
A1	0,00172	0,00597	0,01421	0,02632	0,08649	0,11592	0,07371	0,0066	0,14173
A2	0,00117	0,0039	0,00069	-0,0023	0,00999	-0,0006	0,05991	0,07048	0,6409
A3	-8E-05	-9E-05	0,00021	0,00039	0,00017	0,00035	-0,0011	-0,0004	-0,0019


Tablica 4.6.2.1 koeficijenti polinomskog izraza za izračun preostalog otpora kobilice

U tablici 4.6.2.2. su navedene izračunate vrijednosti preostalog otpora kobilice za zadane Froudove brojeve.

$F_n$	$R_{rk}$ (N)
0.20	-0.0148
0.25	1.7469
0.30	2.7291
0.35	6.7954
0.40	18.595
0.45	29.897
0.50	60.8187
0.55	82.941
0.60	626.163

Tablica 4.6.2.2 Preostali otpor kobilice

Dijagram koji prikazuje krivulju preostalog otpora kobilice u funkciji Froudovog broja prikazan je na slici 4.6.2

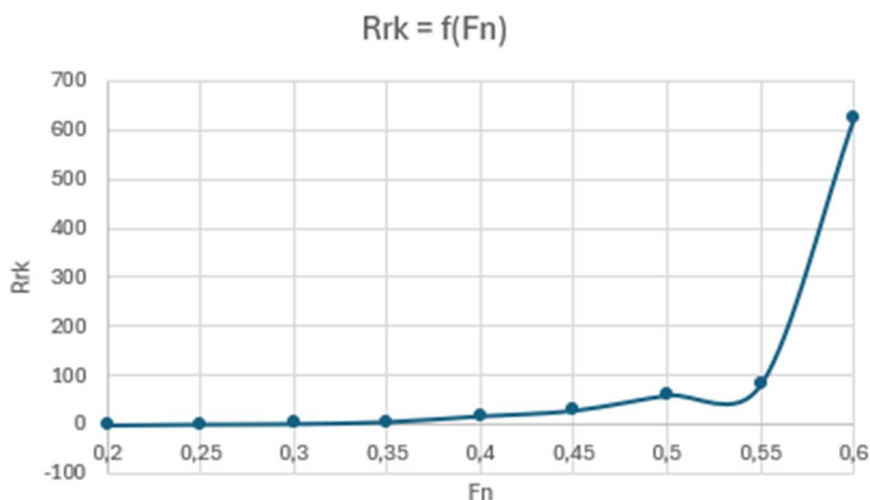

Slika 4.6.2 Dijagram preostalog otpora kobilice

### 4.6.3 Promjena otpora kobilice u ovisnosti o kutu nagiba

Pretpostavlja se da na viskozni otpor privjesaka ne utječe nagnjanje jedrilice, međutim bitan utjecaj na ukupan otpor privjesaka ima preostali otpor, na koji utječe činjenica da se volumen kobilice približava slobodnoj površini, što ovisi o kutu nagiba i brzini jedrilice tj. Froudeovom broju.

Izraz koji se koristi za aproksimaciju otpora privjesaka pod određenim kutem se definira jednadžbom:

$$\frac{\Delta R_{rk} \varphi}{\nabla k * \rho * g} = C_h * F_n^2 * \varphi \quad (4.6.3)$$

$$C_h = H_1 * \frac{T_c}{T} + H_2 * \frac{B_{wl}}{T_c} + H_3 * \frac{T_c}{T} * \frac{B_{wl}}{T_c} + H_4 * \frac{L_{wl}}{\nabla c^{\frac{1}{3}}} = \quad (4.6.4)$$

$$-3.5837 * \frac{0.364}{1.122} + (-0.0518) * \frac{1.838}{0.364} + 0.5958 * \frac{0.364}{1.122} * \frac{1.838}{0.364} + 0.2055 * \frac{5.467}{1.421^{\frac{1}{3}}}$$


$$C_h = 0.5498$$

Vrijednosti promjena otpora kobilice u ovisnosti o kutu nagiba prikazane su u tablici 4.6.3.

$F_n$	$\Delta R_{k\phi 10}$	$\Delta R_{k\phi 20}$	$\Delta R_{k\phi 30}$
0,2	1,47767	2,96383	4,4415
0,25	2,30886	4,63098	6,93984
0,3	3,32475	6,66861	9,99337
0,35	4,52536	9,07672	13,6021
0,4	5,91067	11,8553	17,766
0,45	7,48069	15,0044	22,4851
0,5	9,23543	18,5239	27,7594
0,55	11,1749	22,414	33,5888
0,6	13,299	26,6745	39,9735

Tablica 4.6.3. Promjena otpora kobilice za kuteve nagiba u funkcij  $F_n$

Dijagram na slici 4.6.3 prikazuje krivulje promjene otpora kobilice za kuteve od deset, dvadeset i trideset stupnjeva. Krivulje su prikazane u funkciji Froudovog broja.

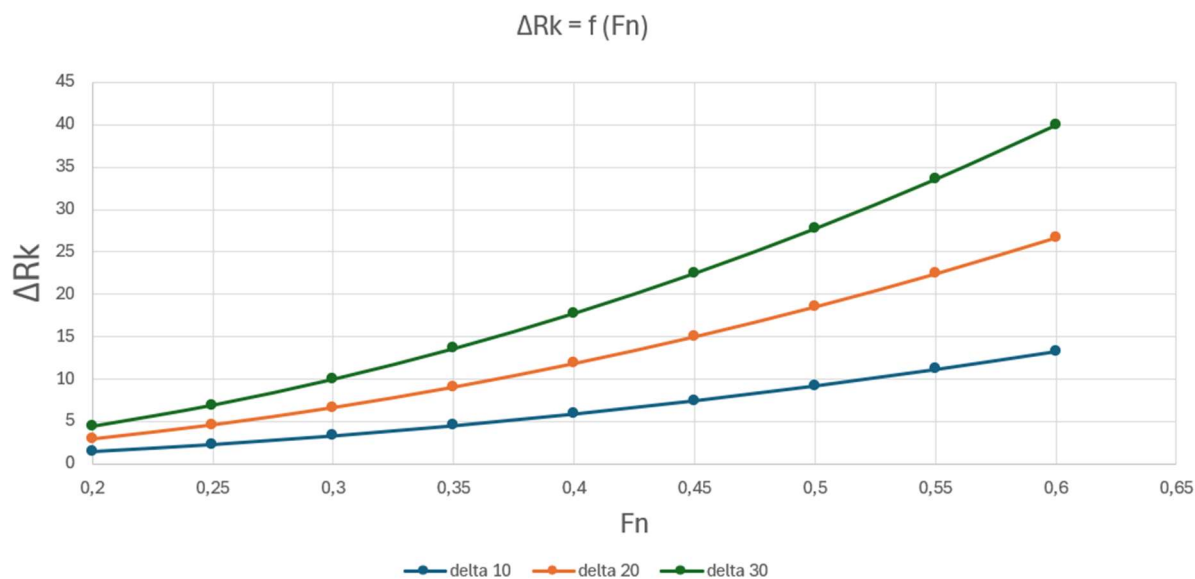

Slika 4.6.3 Dijagram promjene otpora kobilice za nagibe od 10°, 20° i 30°

## 5. Zaključak

U ovom radu izvršena je procjena stabiliteta i otpora jedrilice kategorije L5. Odabrana forma trupa prethodno je modelirana u programskom paketu Rhinoceros 7 i određene su hidrostatičke značajke trupa pomoću paketa Orca 3D za tri stanja opterećenja.

Izrađen je proračun stabiliteta prema ISO 12217-2:2017 , prilog 1. Određene su hidrodinamičke značajke trupa za stanje golog trupa i kobilice u uspravnom stanju, kao i značajke golog trupa i kobilice pod određenim kutem. Izračunate vrijednosti su prikazane tablično za zadani raspon brzina i pomoću dijagrama. Aproksimacija hidrodinamičkih sila jedrilice temeljena je na metodi „Delft Systematic Yacht Hull Serije“

„DSYHS“ metoda se tijekom godina proširivala, a danas sadrži informacije o otporu golog trupa, otporu trupa sa privjescima u ravnom i nagnutom stanju te porastu otpora zbog momenta trima jedara, porastu otpora zbog bočne sile pri različitim brzinama broda i kutovima nagiba. Nove formulacije za relevantne hidrodinamičke sile u funkciji geometrije trupa su izvedene da bi se pokrilo što više različitih oblika trupa i dizajna privjesaka.

Omjeri parametara zadane jedrilice L5 su se nalazili unutar intervala parametara koji su zadani metodom testirajući 50 različitih modela, pa se metoda DSYHS pokazala kao relevantna za aproksimaciju i procjenu otpora zadane jedrilice tipa L5 za zadani raspon brzina.

## ***Literatura***

[1] International Marine Certification Institute, »CALCULATION TOOLS & CHECKLISTS,« [Mrežno]. Available: <https://www.imci.org/52>. [Pokušaj pristupa 20.05.2024]

[2] J.A. Keuning and U.B. Sonnenberg, Approximation of the Hydrodynamic Forces on a Sailing Yacht based on the “Delf Systematic Yacht Hull Series”, Delft university of Technology, Amsterdam, 16. November 1998.

## POPIS SLIKA

Slika 1 Jedrilica L5-slikano u prostoru edukativne radionice “Torpedo” .....	1
Slika 1.1 Model jedrilice izrađen u programu <i>Rhinoceros 7</i> .....	2
Slika 1.2 Nacrt linija jedrilica klase L5.....	2
Slika 2.2 Položaj vodnih linija (VL) za masu istisnine od 1517 kg, 1497 kg, 1090 kg.....	7
Slika 3.1.1 Vidina $h_d$ , visina otvora za naplavljivanje.....	8
Slika 3.1.2 Dijagram momenta nagiba zbog vjetrova i momenta koji vraća jedrilicu u uspravni položaj.....	9
Slika 3.2.1 Poluga stabiliteta za stanje punog opterećenja.....	9
Slika 3.2.2 Poluga stabiliteta za minimalno radno stanje.....	10
Slika 3.2.3 Poluga stabiliteta za stanje plovila u dolasku.....	10
Slika 4.3.1 Dijagram $R_{fh}$ u funkciji raspona brzina.....	15
Slika 4.4.1 Dijagram preostalog otpora golog trupa $R_{rh}$ u funkciji $F_n$ .....	17
Slika 4.5.2 Dijagram promjene preostalog otpora pri kutu od $20^\circ$ u funkciji $F_n$ .....	21
Slika 4.5.3 Dijagram preostalog otpora pri kutu od $20^\circ$ u funkciji $F_n$ .....	21
Slika 4.6.1 Dijagram dodatka za otpor u funkciji brzine.....	23
Slika 4.6.2 Dijagram preostalog otpora kobilice.....	25
Slika 4.6.3 Dijagram promjene otpora kobilice za nagibe od $10^\circ$ , $20^\circ$ i $30^\circ$ .....	26



## POPIS TABLICA

Tablica 2 Glavne izmjere i opći podaci jedrilice.....	3
Tablica 2.1 Raspodjela masa za tri stanja opterećenja.....	4
Tablica 2.1.1 Raspodjela masa i koordinate težišta za maksimalno stanje opterećenja.....	5
Tablica 2.1.2 Raspodjela masa i koordinate težišta za stanje opterećenja plovila u dolasku.....	6
Tablica 2.1.3 Raspodjela masa i koordinate težišta za minimalno radno stanje.....	6
Tablica 7 Zahtjev brzine vjetra.....	8
Tablica 4 Raspon brzina za proračun.....	11
Tablica 4.1.1 Ulazni podaci za proračun.....	11
Tablica 4.1.2 Popis omjera veličina I raspona parametara prema DSYHS-u i za jedrilicu tipa L5.....	12
Tablica 4.3.1 Izračunat Reynoldsov broj, bezdimenzijski koeficijent otpora trenja I otpor trenja za zadani raspon brzina.....	14
Tablica 4.4.1 Koeficijenti polinoma za preostali otpor golog trupa.....	16
Tablica 4.4.2 Izračunate vrijednosti otpora trenja $R_{rh}$ u funkciji $F_n$ .....	16
Tablica 4.5.1.1 Koeficijenti polinoma za površinu uronjenog dijela trupa u ovisnosti o nagibu...18	18
Tablica 4.5.1.2 Vrijednosti površine uronjenog dijela trupa ovisno o kutu nagiba.....	18
Tablica 4.5.1 Vrijednosti otpora trenja za zadane kuteve u funkciji raspona brzina.....	19
Tablica 4.5.1.3 Koeficijenti za polinomski izraz promjene otpora trupa pri nagibu od 20 stupnjeva.....	20
Tablica 4.5.1.4 Promjena preostalog otpora pri kutu od 20° u funkciji $F_n$ .....	20
Tablica 4.6 Glavni parametri kobilice izabranog “Modela 1”.....	22
Tablica 4.6.1 Dodatak za otpor za zadane brzine.....	23
Tablica 4.6.2.1 Koeficijenti polinomskog izraza za izračun preostalog otpora kobilice.....	24

Tablica 4.6.2.2 Preostali otpor kobilice.....	24
Tablica 4.6.3 Promjena otpora kobilice za kuteve nagiba u funkciji $F_n$ .....	26

## Sažetak

Ovaj rad se temelji na procjeni stabiliteta i otpora jedrilice klase L5. Model je bio zadan u programu *Rhinoceros 7*. Stabilitet plovila procenjen je prema normi ISO 12217-2:2017 koristeći dostupan tablični kalkulator. Hidrostatičke značajke plovila su dobivene koristeći dodatak *Orca 3D*. Procjena otpora je analizirana metodom “Delft Systematic Yacht Hull Series” autora J. A. Keuning i U. B. Sonnenberg. Prepostavljeni su otpori za određeni interval brzina. Rezultati su prikazani tablično i grafički.

Ključne riječi: jedrilica, stabilitet, hidrostatske značajke, otpor trenja, preostali otpor, promjena otpora.

## Summary

This paper focuses on the assessment of the stability and resistance of an L5 class sailing boat. The model of the sailing boat was created using *Rhinoceros 7* software. The vessel's stability was assessed according to the ISO 12217-2:2017 standard using an available spreadsheet calculator. The hydrostatic characteristics of the vessel were obtained using the *Orca 3D*. The resistance evaluation was conducted using “Delft Systematic Yacht Hull Series” method developed by J. A. Keuning and U. B. Sonnenberg, with assumed resistance values for specific speed range. The results are presented in both tabular and graphical formats.

Keywords: Sailing boat, stability, hydrostatic characteristics, frictional resistance, residual resistance, resistance variation.

**ISO 12217-2:2017 SAILING BOATS OF LENGTH GREATER THAN OR EQUAL TO 6m**

**Monohulls only**

Manufacturer:	ZAVRŠNI RAD
Signatory, Name:	MARIJA BAŠIĆ
Signatory, Title:	
Phone:	
Email:	
WWW:	
CIN Model Year:	
Model Name:	SAILING BOAT L5-CLASS

*This calculation sheet is provided by IMCI "as is" and any express or implied warranties, including, but not limited to, the implied warranties of fitness for a particular purpose are disclaimed.*

blue cells are derived values

yellow cells require data input

**Please make sure to set your signature on the summary! (worksheet 16)  
either digitally or print summary, sign and attach scan**

- most worksheets have additional comments / remarks / other calculations beside the printout area; please take into account.
- If curves or righting moments are required, please fill in worksheets 6a and 6b or attach curve of righting moments for both loading conditions to the documentation.
- For boats with quick-draining cockpit the cockpit calculation according to ISO 11812 shall be enclosed to the documentation.
- Please attach other detailed information as appropriate, e.g. photos, sketches etc. for sill height, openings, companion way doors, location of flooding points, practical tests etc.
- Please think before printing the complete workbook; often some of the worksheets are not needed. In this case please print out only single worksheets
- When entering data, please use the correct separator for your Excel version, many application problems are the result of incorrect separators ( , or . )

- Please be aware that there is NO technical difference between the requirements of ISO 12217-2:2015 and ISO 12217-2:2017; change of the name is just because of the harmonisation process; for FDIS ISO 12217-2:2020 the main change is exclusion of optional equipment from the maximum load and the result of the "maximum recommended load for builder's plate" (With ISO 14945 and ISO 14946 renamed to "maximum load for the builder's plate,  $m_{MBP}$ ") which excludes OB engine weights and the optional equipment.

**ISO 12217-2:2017 SAILING BOATS OF LENGTH GREATER THAN OR EQUAL TO 6m  
CALCULATION WORKSHEET No. 1**

ISO 12217-2:2017 en240408

**ZAVRŠNI RAD SAILING BOAT L5-CLASS**

Design Category intended: <b>C</b>	Monohull / multihull: <b>Monohull</b>				
Item	Symbol	Unit	Value	Ref.	
Length of hull as in ISO 8666	$L_H$	m	6,17	3.4.1	
Length of waterline in loaded arrival condition	$L_{wl}$	m	5,47	3.4.2	
<b>Empty Craft condition mass</b>	$m_{EC}$	kg	910,0	3.5.1	
standard equipment		kg	60,0	3.6.12	
water ballast in tanks which are notified in the owner's manual to be filled when the boat is afloat		kg	0,0	3.5.2	
Light craft condition mass	$m_{LC}$	kg	970,0	3.5.2	
<b>Mass of:</b>					
Desired crew limit	CL	----	5	3.6.3	
Mass of:					
desired crew limit at 75 kg each		kg	375,0	'3.5.4	
provisions + personal effects		kg	100,0	'3.5.4	
drinking water		kg	0,0	'3.5.4	
fuel		kg	17,6	'3.5.4	
lubricating and hydraulic oils		kg	0,0	'3.5.4	
black water		kg	0,0	'3.5.4	
grey water		kg	0,0	'3.5.4	
water ballast		kg	0,0	'3.5.4	
other fluids carried aboard		kg	0,0	'3.5.4	
stores, spare gear and cargo (if any)		kg	20,0	'3.5.4	
inflatable life raft(s) in excess of essential safety equipment		kg	35,0	'3.5.4	
other small boats carried aboard		kg	0,0	'3.5.4	
Maximum load = sum of above masses (ISO 12217-2:2020)	$m_L$	kg	547,6	'3.5.4	
optional equipment and fittings not included in basic outfit		kg	0,0	'3.5.4	
Maximum load = sum of above masses using ISO 12217-2:2017	$m_L$	kg	547,6	'3.5.4	
<b>Maximum Load condition mass</b>	$m_{LDC}$	kg	1517,6	'3.5.5	
mass to be removed for loaded arrival condition		kg	20,0	'3.5.6	
<b>Loaded Arrival condition mass</b>	$m_{LA}$	kg	1497,6	'3.5.6	
<b>Mass of:</b>					
minimum number of crew according to 3.5.3		kg	75	3.5.3a)	
non-consumable stores and equipment normally aboard		kg	10,0	3.5.3b)	
inflatable life raft		kg	35,0	'3.5.3	
Load to be included in Minimum Operating Condition	$m'_L$	kg	120,0	'3.5.3	
<b>Light craft condition mass</b>	$m_{LC}$	kg	970,0	'3.5.2	
Mass in the Minimum Operating Condition	$m_{MO}$	kg	1090,0	'3.5.3	
Maximum load for the builder's plate using EN ISO 14945:2021 and EN ISO 14946:2021 (if manually reduced on Worksheet 1b the reduced value is shown)	$m_{MBP}$	kg	510,0	ISO 14945 ISO 14946	
<b>Is boat sail or non-sail?</b> nominal sail area	$A_S$	m <sup>2</sup>	21,9	'3.4.8	
sail area / displacement ratio = $A_S / (m_{LDC})^{2/3}$		----	0,1655	3.1.2	
CLASSIFIED AS [non-sail if $A_S / (m_{LDC})^{2/3} < 0.07$ ]	SAIL/NON-SAIL ?		<b>SAIL</b>	3.1.2	

NB If SAIL, continue using these worksheets, if NON-SAIL, use ISO 12217-1

## ISO 12217-2:2017 / ISO 14945:2021 CALCULATION WORKSHEET No.1b Builder's plate

ZAVRŠNI RAD SAILING BOAT L5-CLASS

Since 2021-12-09 EN ISO 14945:2021 and EN ISO 14946:2021 are harmonised!

The formerly 'Maximum recommended load for builder's plate' became '**Maximum load for the builder's plate**',  $m_{MBP}$ .

$m_{MBP}$  does not include the optional equipment anymore; also the weight of outboard engines is excluded from  $m_{MBP}$  and can be shown in a separated line on the plate.

Below you find an example for the builder's plate with the maximum value for  $m_{MBP}$  calculated from the stability calculation on worksheet 1.

For portable tanks, please change the default 'yes' on the right side in 'no, portable tank'; the weight of the tank will be included in  $m_{MBP}$ .


Please be aware that ISO 14946:2021 allows in clause 6 that the maximum recommended load can be downrated or limited by the manufacturer at any time. Therefore you find an extra cell to enter a manual reduced value for the maximum load for the builder's plate.

Please be also aware that the design of these plates is just a proposal from EN ISO 14945, the manufacturer is free to change the design as long as all requirements of the standard are fulfilled.

Item	Value	Unit	Ref.
Manually reduced value for the 'Maximum load for the builder's plate' $m_{MBP}$	510	kg	EN ISO 14945, cl. 6, note 2
Maximum engine power of a single engine	8	kW	
number of engines	1		

Please see builder's plate example with values calculated from worksheet 1 entries on next page:

Builder's plate information for craft powered by inboard or sterndrive engines

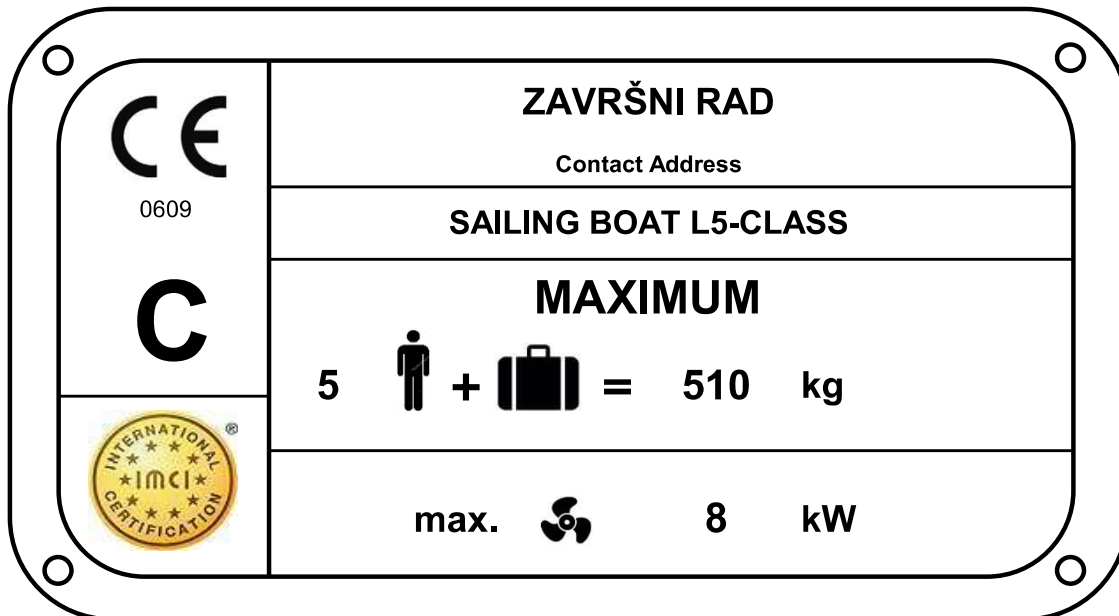

## ISO 12217-2:2017 CALCULATION WORKSHEET No.2 TESTS TO BE APPLIED

### ZAVRŠNI RAD SAILING BOAT L5-CLASS

Question	Symbol	Unit	Answer	Ref.	
Is boat fully enclosed? (see definition in ref.)			Yes / No	No	3.1.8
Is boat a catamaran or trimaran?			Yes / No	No	3.1.3, 3.1.4
If NO, choose from options 1 to 7.					
Length of hull	$L_H$	m		6,17	3.4.1
Beam of Hull	$B_H$			2,04	
If boat is a multihull: Beam between centres of buoyancy of sidehulls	$B_{CB}$	m		1,80	3.4.5
Is ratio $L_H/B_{CB} > 5$			Yes / No	No	7.1
If YES, treat the boat as a monohull, and choose from options 1 to 7. If NO, use option 8; use multihull excel calculation template					
Mass in the minimum operating condition	$m_{MO}$	kg		1090	3.5.3
Mass in the loaded arrival condition	$m_{LA}$	kg		1498	3.5.6

Choose any ONE of the following options and use all the worksheets indicated for that option.

Option	All boats except catamarans and trimarans with $L_H / B_{CB} > 5$							Multih.
	1	2	3	4	5	6	7	
categories possible	A + B	C + D	C + D	C + D	C + D	C + D	C + D	A – D
decking or covering	fully enclosed	fully enclosed	any amount	any amount	any amount	any amount	any amount	see note a
downflooding openings	3	3	3	3	3	3	3	3
downflooding angle	3	3						
downflooding height test	all boats	3	3	3		3		3
	full method	4	4	4		4		4
recess size	5 <sup>b</sup>				5 <sup>c</sup>	5 <sup>c</sup>		5 <sup>d</sup>
minimum energy	6	6						
angle of vanishing stability	6	6						
stability index	7	7						
knockdown-recovery test			8	8				
wind stiffness test					9	9		
flotation requirement				10		10		10 <sup>d</sup>
capsize recovery test							11	
bare poles speed								12
wind speed limits								13
stability requirements								14
habitable multihulls								14 <sup>e</sup>
detection & removal of water	15	15	15	15	15	15	15	15
SUMMARY	16	16	16	16	16	16	16	16

a Fully enclosed if category A or B, otherwise any amount.

b Only applicable to boats for category B using 6.5.2 and having  $\phi V < 90^\circ$ .

c Only applicable to boats of design category C that are fully enclosed.

d Applicable for category A,B and boats of design category C that are fully enclosed

e Only applicable if boat is defined as habitable according to 3.1.9, and is deemed to be vulnerable to inversion when used in design category – see 7.11.2 & 7.11.3.

Option selected	5
-----------------	---



## ISO 12217-2:2017 CALCULATION WORKSHEET No. 3 DOWNFLOODING

**ZAVRŠNI RAD SAILING BOAT L5-CLASS**

### Downflooding Openings:

Question	Answer	Ref.
Have all appropriate downflooding openings been identified?	Yes	6.2.1
Have potential downflooding openings within the boat been identified?	Yes	6.2.1.4
Do all closing appliances satisfy ISO 12216?	Yes	6.2.1.1
Hatches or opening type appliances are not fitted below minimum height above waterline? *	Yes	6.2.1.2
Seacocks comply with requirements?	Yes	6.2.1.3
Are all openings on design category A or B boats fitted with closing appliances? **	No	6.2.1.5
<b>Categories possible: A or B if all are YES, C or D if first five are YES</b>	<b>C</b>	6.2.1

\* Except for emergency escape hatches on design category C boats, where 0,1 m is allowable \*\* Except openings for ventilation and engine combustion

### Exemptions Downflooding Openings:

Question	Answer	Ref.
Drains from quick-draining recesses or watertight recesses acc. to cl. 6.1.1.6 b) are either:		
1) freeing ports with non-return flaps which are watertight from the exterior (degree 3) <b>or</b>		6.2.1.6 b)
2) have a drainage area smaller than three times the minimum area required of ISO 11812		6.2.1.6 b)
		6.2.1.6 b)
Opening appliances (e.g. side doors) in the topsides which comply with ISO 12216 are		
1) referenced in the owner's manual as watertight closure to be kept shut when under way, <b>and</b>		6.2.1.6 d)
2) marked inboard with "KEEP SHUT WHEN ..." in upper case letters not less than 4,8 mm high, <b>and</b>		6.2.1.6 d)
3) the height above waterline of the lowest part is > 50% of required downflooding height		6.2.1.6 d)
		6.2.1.6 d)
All other exemptions of cl. 6.2.1.6 checked and requirements fulfilled?	Yes	6.2.1.6
		6.2.1.6

### Downflooding angle:

Item	Symbol	Unit	Value	Ref.
Required value:				6.2.3
Cats. A + B = 40°, Cat. C = 35°, Cat. D = 30°	$\varnothing_{D(R)}$	degrees	<b>35</b>	Table 3
Actual Downflooding Angle: any opening at $m_{MO}$	$\varnothing_D$	degrees	<b>69,40</b>	3.3.2
Actual Downflooding Angle: any opening at $m_{LA}$	$\varnothing_D$	degrees	<b>67,80</b>	3.3.2
Method used to determine $\varnothing_D$ :				Annex B
Category possible on Downflooding Angle $\varnothing_D$ :			<b>n.a.</b>	6.2.3
Actual downflooding angle: to non-quickdraining recess at $m_{MO}$	$\varnothing_{DC}$	degrees	<b>69,4</b>	3.3.2
Actual downflooding angle: to non-quickdraining recess at $m_{LA}$	$\varnothing_{DC}$	degrees	<b>67,8</b>	3.3.2
Actual downflooding angle: to main hatchway at $m_{MO}$	$\varnothing_{DH}$	degrees	<b>69,4</b>	3.3.2
Actual downflooding angle: to main hatchway at $m_{LA}$	$\varnothing_{DH}$	degrees	<b>67,8</b>	3.3.2

### Downflooding Height:

Requirement	Basic requirement	Reduced value for small openings
Applicable to	options 1-3, 5 and 8	options 1-3,5 and 8, but only if fig. 2 is used
Ref.	6.1.2.2 a)	6.1.2.2 d)
obtained from Fig. 2 or annex A?	fig. 2	= basic x 0.75
Maximum area of small openings ( $50L_H^2$ ) (mm <sup>2</sup> ) =	1903	
Required downflooding height $h_{D(R)}$	Fig. 2 / ann. A Category A	
	Fig. 2 / ann. A Category B	
	Fig. 2 / ann. A Category C	<b>0,36</b>
	Fig. 2 / ann. A Category D	
Actual Downflooding Height $h_D$	Ref. 6.2.2.1	<b>0,736</b>
Design Category possible	<b>C</b>	<b>C</b>
<b>Design Category possible on Downflooding Height = lowest of above</b>		
		<b>C</b>

**ISO 12217-2:2017 CALCULATION WORKSHEET No.3a DOWNFLOODING OPENINGS / CLOSING APPLIANCES**


**ZAVRŠNI RAD SAILING BOAT L5-CLASS**

**General overview downflooding openings and closing appliances**


*NOTE: All drawings are not blocked by a password, so please replace with own drawings if at hand.*

*NOTE: See X,Y, Z coordinates for worksheet 3b as illustrated below*


**Top View**

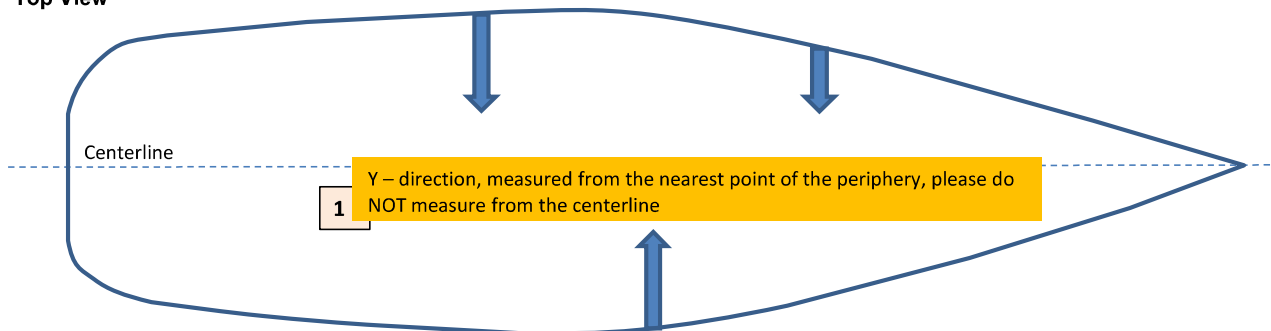

**Side View Starboard**

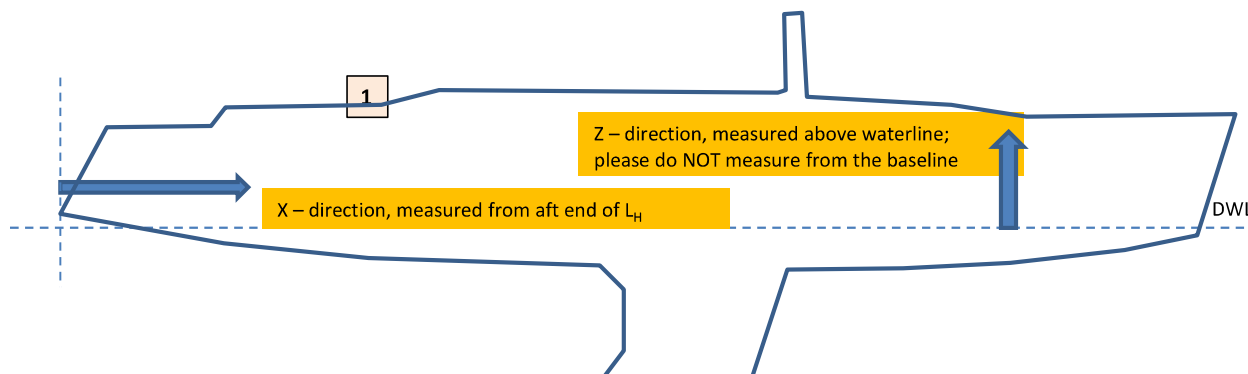

**Side View Port**

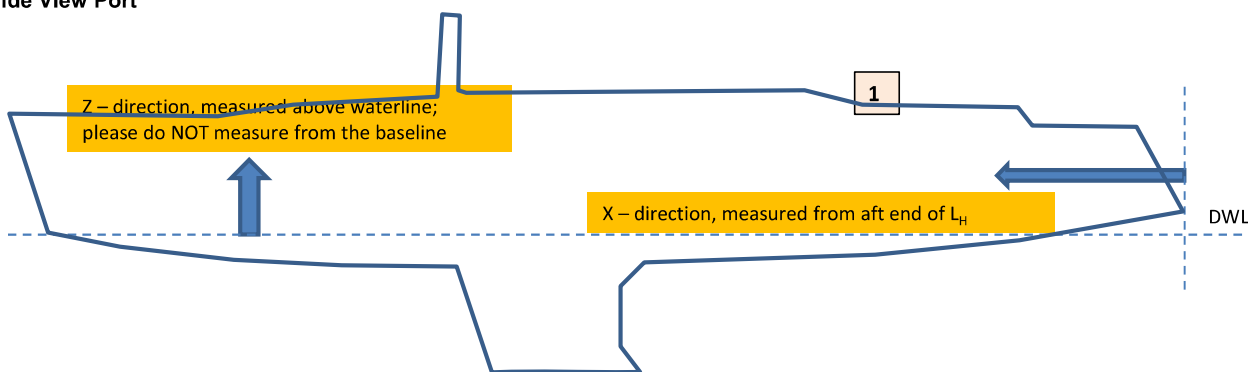

Please insert a short description and measurements of downflooding openings and closing appliances under the corresponding number on worksheet 3b

## ISO 12217-2:2017 CALCULATION WORKSHEET No.3b DOWNFLOODING OPENINGS

**ZAVRŠNI RAD      SAILING BOAT L5-CLASS**

General overview downflooding openings and closing appliances

**NOTE: Please submit for every pre-fabricated closing appliance a declaration of conformity (DoC) of the product.  
Please submit for every non pre-fabricated closing appliance a calculation acc. to ISO 12216 (see IMCI template).  
For both a watertightness test must be done!**

Description of the downflooding opening / closing appliance	Nr.	X <sup>(a)</sup> [m]	Y [m]	Z (=h <sub>D</sub> ) [m]	watertightness test done?	opening type <sup>(b)</sup>
sheerline	1	2,50	0,73	0,74	n.a.	downflooding opening
	2					
	3					
	4					
	5					
	6					
	7					
	8					
	9					
	10					
	11					
	12					
	13					
	14					
	15					
	16					
	17					
	18					
	19					
	20					
	21					
	22					

**(a)** Please be aware that X is measured from the aft end of L<sub>H</sub>.

In Annex A calculations x<sub>D</sub> is measured from the bow or stern, whichever is nearest

**(b)** opening types are: normal downflooding openings without any opening appliances; pre-fabricated opening appliances; non-pre-fabricated opening appliances and other devices

**ISO 12217-2:2017 CALCULATION WORKSHEET No.4 DOWNFLOODING HEIGHT**

**ZAVRŠNI RAD SAILING BOAT L5-CLASS**

Calculation using normativ annex A (options 1-3 and 5 only)

Item	Symbol	Unit	Opening 1	Opening 2	Opening 3	Opening 4
<b>Position of openings</b>						
Least longitudinal distance from bow/stern	$x_D$	m				
Least travers distance from gunwale	$y_D$	m				
$F_1 = \text{greater of } (1 - x_D / L_H) \text{ or } (1 - y_D / B_H)$	$F_1$	----	1,00	1,00	1,00	1,00
<b>Size of openings:</b>						
Combined area of openings to top of any down-flooding opening	$a$	mm <sup>2</sup>				
Longitudinal distance of opening from tip of bow	$x'_D$	m				
Limiting value of $a = (30L_H)^2$		mm <sup>2</sup>	34262	34262	34262	34262
If $a \geq (30L_H)^2, F_2 = 1,0$ If $a < (30L_H)^2, F_2 = 1 + \frac{x'_D}{L_H} \left( \frac{\sqrt{a}}{75 L_H} - 0,4 \right)$	$F_2$	----	1,00	1,00	1,00	1,00
<b>Size of recesses:</b>						
Volume of recesses which are not self-draining in accordance with ISO 11812	$V_R$	m <sup>3</sup>				
Freeboard amidships (see 3.4.6)	$F_M$	m				
Is opening not a recess? Is recess quickdraining? Is recess not quickdraining?						
$k = V_R / (L_H B_H F_M)$	$k$	----				
If opening is not a recess, $F_3 = 1$ If recess is quickdraining, $F_3 = 0.7$ If recess is not quick draining, $F_3 = (0,7 + k^{0.5})$	$F_3$	----	1,20	1,20	1,20	1,20
<b>Displacement:</b>						
Loaded displacement volume (see 3.5.7)	$V_D$	m <sup>3</sup>	1,48			
$B = B_H$ for monohulls	$B$	m	2,04			
$F_4 = [(10 V_D) / (L_H B^2)]^{1/3}$	$F_4$	----	0,83			
<b>Flotation:</b>						
For boats using option 4 or 6, $F_5 = 0.8$	$F_5$	----	1			
For all other boats, $F_5 = 1.0$						
<b>Required calculation height:</b> $= F_1 F_2 F_3 F_4 F_5 L_H / 15$	$h_{D(R)}$	m	0,41	0,41	0,41	0,41
Required downflooding height with limits applied (see annex A, Table A.1)	Category A	$h_{D(R)}$	m			
	Category B	$h_{D(R)}$	m			
	Category C	$h_{D(R)}$	m	0,3	0,3	0,3
	Category D	$h_{D(R)}$	m			
<b>Measured Downflooding Height:</b>	$h_D$	m				
<b>Design Category possible:</b>						
			Lowest of above =			<b>Fail</b>

**ISO 12217-2:2017 CALCULATION WORKSHEET No. 5 RECESS SIZE**

**ZAVRŠNI RAD SAILING BOAT L5-CLASS**

**NB: This sheet is to be completed for the Loaded Arrival Condition.**

**calculation not applicable**

**Further exemptions according to 6.5.1**

Angle of vanishing stability > 90° ?	YES/NO	Yes	6.3.1a)
Over at least 35% of the periphery is the depth of the recess less than 3% of the max. breadth of the recess (e.g. toe rails, low bulwarks)	YES/NO		6.3.1b)
At least 5% of the bulwark area positioned within the lowest 25% of the bulwark height drains overboard and the bulwark height is less than 12,5% of the maximum breadth of the recess <i>(attention, req. 1) and 2) below must get also a "Yes" to fulfill all requirements)</i>	YES/NO		6.3.1c)
Unobstructed drainage area from the recess on each side of the boat centreline	m <sup>2</sup>		6.3.1d)
Volume of the recess to the recess retention level	m <sup>3</sup>		
Drainage area per side (m <sup>2</sup> ) divided by recess volume (m <sup>3</sup> )			6.3.1d)
Height position of drainage area (lowest 25% / lowest 50% / full depth)			6.3.1d)
Requirements of 6.3.1.d) fulfilled? <i>(attention, req. 1) and 2) below must get also a "Yes"</i>	YES/NO		6.3.1d)
1) the lower edge of the drainage openings are not more than 10 mm above recess sole height for at least 70 % of the width of each opening?	YES/NO		6.3.1 c) & d)
2) If drainage area is provided by an open or partially open transom, are the openings extend to the outboard sides of the recess sole on both sides?	YES/NO		6.3.1 c) & d)

Is recess exempt from size limit? If "yes", no further calculation required.			6.3.1
--	--	--	-------

**Calculation methods:**

Item	Symbol	Unit	Value	Ref.
<b>SIMPLIFIED METHOD:</b> Use 1), 2) or 3) below.				
Average freeboard to loaded waterline at aft end of recess	$F_A$	m		6.3.2.1
Average freeboard to loaded waterline at sides of recess	$F_S$	m		6.3.2.1
Average freeboard to loaded waterline at forward end of recess	$F_F$	m		6.3.2.1
Waterline length at mL <sub>A</sub>	$L_{WL}$	m		
Waterline breadth at mL <sub>A</sub>	$B_{WL}$	m		
Maximum length of recess at the retention level (see 3.5.11)	$l$	m		6.3.2.4
Maximum breadth of recess at the retention level (see 3.5.11)	$b$	m		6.3.2.4

*- In case of asymmetric recesses please insert length and breadth of each area below; this allows a more exact calculation using simplified method 1) or 2)*

	max. length	max. breadth	Unit	% loss GMT (option 1)	% loss GMT (option 2)	Ref.
Maximum length and breadth of recess part A			m			6.3.2.2/3
Maximum length and breadth of recess part B			m			6.3.2.2/3
Maximum length and breadth of recess part C			m			6.3.2.2/3
Maximum length and breadth of recess part D			m			6.3.2.2/3
Maximum length and breadth of recess part E			m			6.3.2.2/3
Maximum length and breadth of recess part F			m			6.3.2.2/3
Maximum length and breadth of recess part G			m			6.3.2.2/3
Maximum length and breadth of recess part H			m			6.3.2.2/3
Maximum length and breadth of recess part I			m			6.3.2.2/3

to be continued on page 2

**ISO 12217-2:2017 CALCULATION WORKSHEET No. 5 RECESS SIZE**

page 2

	Symbol	Unit	Value	Ref.
Average freeboard to recess periphery $= (F_A + 2F_S + F_F) / 4$	$F_R$	m	0	6.3.2.1
Category A permitted percentage loss in metacentric height $(GM_T) = 250 F_R / L_H$			n.a.	6.3.2.1
Category B permitted percentage loss in metacentric height $(GM_T) = 550 F_R / L_H$			n.a.	6.3.2.1
Category C permitted percentage loss in metacentric height $(GM_T) = 1\,200 F_R / L_H$			0	6.3.2.1
<b>SIMPLIFIED METHOD: Use 1), 2) or 3) below.</b>				
<b>1) Loss of <math>GM_T</math> used?</b>				6.3.2.2
Second moment of area of free-surface of recess	$SMA_{RECESS}$	m <sup>4</sup>	0	6.3.2.2
Metacentric height of boat at $m_{LA}$	$GM_T$	m		6.3.2.2
Calculated percentage loss in metacentric height	$(GM_T) = \frac{102\,500 \times SMA_{RECESS}}{m_{LA} \times GM_T}$			6.3.2.2
<b>2) Second moment of areas used?</b>				6.3.2.3
Second moment of area of free-surface of recess	$SMA_{RECESS}$	m <sup>4</sup>	0	6.3.2.3
Second moment of area of waterplane of boat at $m_{LA}$	$SMA_{WP}$	m <sup>4</sup>	0	6.3.2.3
Calculated percentage loss in metacentric height	$(GM_T) = \left( \frac{245 \times SMA_{RECESS}}{SMA_{WP}} \right)$			6.3.2.3
<b>3) Recess dimensions used?</b>				6.3.2.4
Maximum length of recess at the retention level (see 3.6.11)	$l$	m	0	6.3.2.4
Maximum breadth of recess at the retention level (see 3.6.11)	$b$	m	0	6.3.2.4
Calculated percentage loss in metacentric height	$(GM_T) = 270 \left( \frac{l \times b^3}{L_H \times B_H^3} \right)^{0.7}$			6.3.2.4
<b>Requirement: from results above, applied design category possible?</b>			n.a.	6.3.2.1
<b>DIRECT CALCULATION METHOD used?</b>				6.3.3
percentage full of water = $60 - 240 F / L_H$				6.3.3a)
actual residual righting moment up to $\phi_D, \phi_V$ or $90^\circ$ whichever is least		N·m		6.3.3b)
required residual righting moment up to $\phi_D, \phi_V$ or $90^\circ$ whichever is least		N·m	3144,9075	6.3.3b)
design category possible			Fail	

ISO 12217-2:2017 CALCULATION WORKSHEET No. 6

MINIMUM RIGHTING ENERGY  
& ANGLE OF VANISHING STABILITY

ZAVRŠNI RAD SAILING BOAT L5-CLASS

Minimum righting energy:

Design categories A and B only

Item	Symbol	Unit	$m_{MO}$	Ref.
Mass in minimum operating condition	$m_{MO}$	kg	1090	3.5.3
Area under GZ curve up to $\Phi_V$ $m_{MO}$	$A_{GZ}$	m deg	20,41	6.4
Righting energy up to $\Phi_V = m_{MO} A_{GZ}$	$E_{GZ}$	kg m deg	22249	6.4
Requirement: For Category A: $E_{GZ} \geq 172\ 000$ ; for Category B: $E_{GZ} \geq 57\ 000$ .				Table 4
Category possible on minimum energy:				

Angle of vanishing stability:

Item	Symbol	Unit	$m_{MO}$	$m_{LA}$	Ref.
Required value of angle of vanishing stability: Category A = $(130 - m/500)$ but $\geq 100^\circ$ Category B = $(130 - m/200)$ but $\geq 95^\circ$ Category C = $90^\circ$ Category D = $75^\circ$	$\Phi_{V(R)}$	degree	90,00	90,00	6.5 Table 5
Actual angle of vanishing stability:	$\Phi_V$	degree	98,48	100,00	3.4.10
Category possible on angle of vanishing stability:			C	C	6.5.1

Alternative for Design Category B only:

method used?

No

Item	Symbol	Unit	$m_{MO}$	$m_{LA}$	Ref.
Mass of boat in each condition	$m_{MO}$ or $m_{LA}$	kg	1090	1497,575	3.5.3 or 3.5.6
Required value of $\phi_V = (130 - 0,005m)$ but always $\geq 75^\circ$	$\Phi_{V(R)}$	degree	124,55	122,51213	6.5.2a)
Actual angle of vanishing stability:	$\Phi_V$	degree	98,48	100,00	3.4.10
Is required value of $\phi_V$ attained?		Yes / No	No	No	6.5.2a)
Volume of buoyancy calculated according to annex D	$V_B$	$m^3$	0		annex D
Mass of boat in maximum load condition	$m_{LDC}$	kg	1517,575		3.5.5
Is $V_B > (m_{LDC}/850)$ ?		Yes / No	No		6.5.2b)
Are accesses to non-habitable compartments fitted with hatches or doors watertight to degree 2 and marked "Keep shut when under way" ?		Yes / No			6.5.2c)
Do flotation elements (where fitted) comply with annex E ?		Yes / No			6.5.2d)
Is stability information required by 6.5.2e) supplied ?		Yes / No			6.5.2e)
Are safety signs according to Figure 3 displayed ?		Yes / No			6.5.2f)
Can boat be assigned Design Category B?			NO		6.5.2

ISO 12217-2:2017 CALCULATION WORKSHEET No. 6a curve of righting moment  $m_r$

ZAVRŠNI RAD SAILING BOAT L5-CLASS

insert curve of righting moment in 5° steps in one of following units:

*N m*      *kg m*      *m*

chosen unit


heeling angle[°]	insert Heeling Arm/Moment [Nm, kg m, m]	Heeling Moment [Nm]	Heeling Moment [kg m]	Arm Gz [m]
0	0	0	0	0,000
5	0,06	641	65	0,060
10	0,114	1.218	124	0,114
15	0,16	1.710	174	0,160
20	0,2	2.138	218	0,200
25	0,235	2.512	256	0,235
30	0,268	2.865	292	0,268
35	0,297	3.174	324	0,297
40	0,318	3.399	347	0,318
45	0,33	3.527	360	0,330
50	0,333	3.559	363	0,333
55	0,33	3.527	360	0,330
60	0,318	3.399	347	0,318
65	0,278	2.971	303	0,278
70	0,244	2.608	266	0,244
75	0,206	2.202	225	0,206
80	0,165	1.764	180	0,165
85	0,122	1.304	133	0,122
90	0,077	823	84	0,077
95	0,032	342	35	0,032
100	-0,014	-150	-15	-0,014
105		0	0	0,000
110		0	0	0,000
115		0	0	0,000
120		0	0	0,000
125		0	0	0,000
130		0	0	0,000
135		0	0	0,000
140		0	0	0,000
145		0	0	0,000
150		0	0	0,000
155		0	0	0,000
160		0	0	0,000

Angle of vanishing stability  degrees      Area under GZ curve  m deg



ISO 12217-2:2017 CALCULATION WORKSHEET No. 6a curve of righting moment  $m_1$

**INTERNATIONAL MARINE CERTIFICATION INSTITUTE**  
INTERNATIONAL NON-PROFIT ASSOCIATION

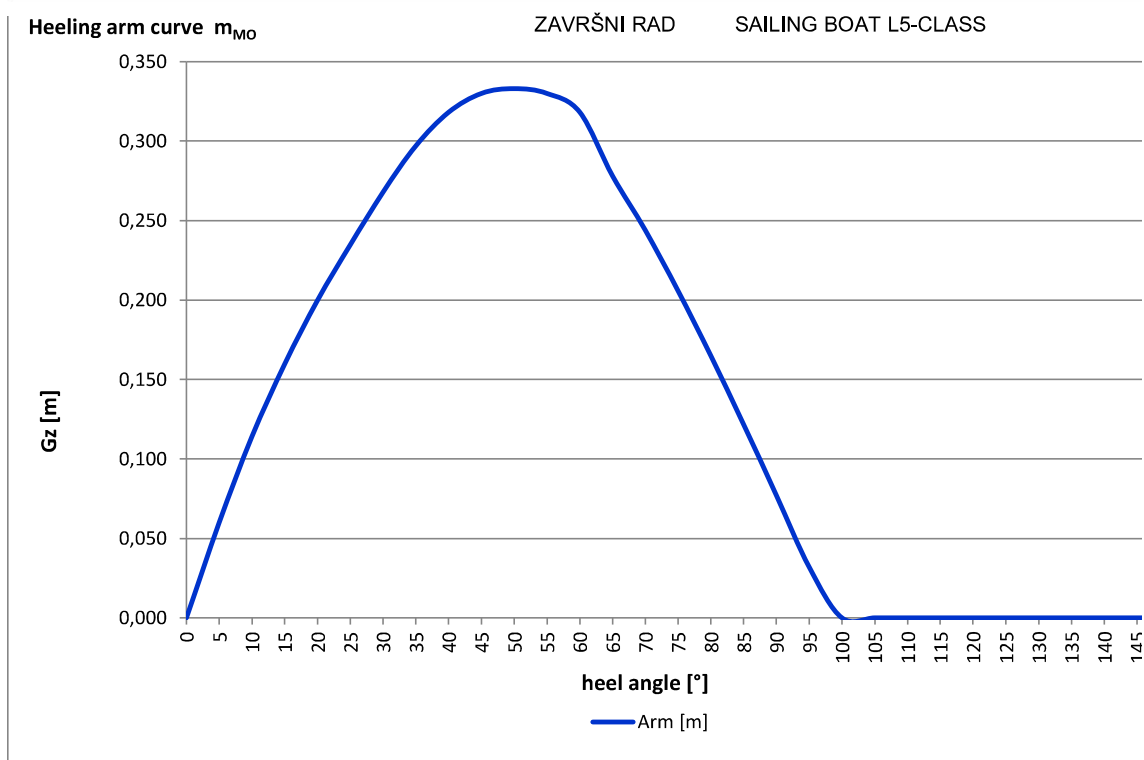

ISO 12217-2:2017 CALCULATION WORKSHEET No. 6b curve of righting moment m

ZAVRŠNI RAD SAILING BOAT L5-CLASS

insert curve of righting moment in 5° steps in one of following units:

*N m*      *kg m*      *m*

chosen unit

heeling angle[°]	insert Heeling Arm/Moment [Nm, kg m, m]	Heeling Moment [Nm]	Heeling Moment [kg m]	Arm Gz [m]
0	0	0	0	0,000
5	0,053	778	79	0,053
10	0,102	1.498	153	0,102
15	0,144	2.115	216	0,144
20	0,179	2.629	268	0,179
25	0,209	3.069	313	0,209
30	0,234	3.436	350	0,234
35	0,251	3.686	376	0,251
40	0,259	3.803	388	0,259
45	0,259	3.803	388	0,259
50	0,252	3.701	377	0,252
55	0,24	3.524	359	0,240
60	0,225	3.304	337	0,225
65	0,207	3.040	310	0,207
70	0,185	2.717	277	0,185
75	0,16	2.350	240	0,160
80	0,126	1.850	189	0,126
85	0,09	1.322	135	0,090
90	0,052	764	78	0,052
95	0,013	191	19	0,013
100		0	0	0,000
105		0	0	0,000
110		0	0	0,000
115		0	0	0,000
120		0	0	0,000
125		0	0	0,000
130		0	0	0,000
135		0	0	0,000
140		0	0	0,000
145		0	0	0,000
150		0	0	0,000
155		0	0	0,000
160		0	0	0,000

Angle of vanishing stability  degrees      Area under GZ curve  m deg


ISO 12217-2:2017 CALCULATION WORKSHEET No. 6b curve of righting moment m

**INTERNATIONAL MARINE CERTIFICATION INSTITUTE**  
INTERNATIONAL NON-PROFIT ASSOCIATION

Heeling arm curve  $m_{LA}$

ZAVRŠNI RAD

SAILING BOAT L5-CLASS

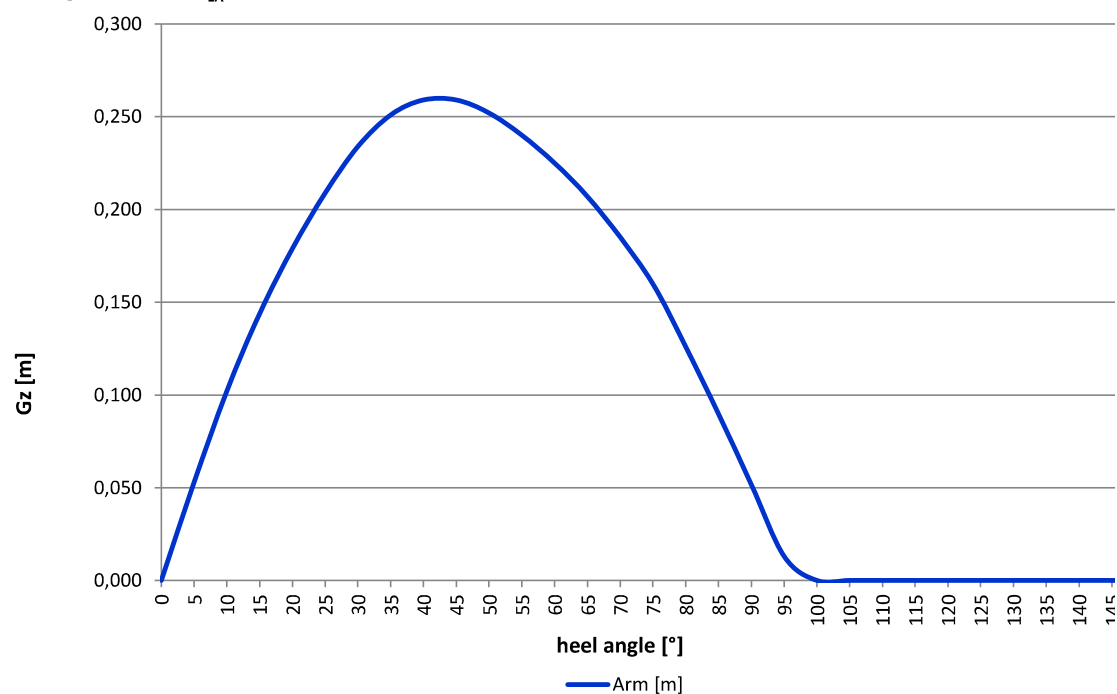

ISO 12217-2:2017 CALCULATION WORKSHEET No. 7a

STABILITY INDEX

ZAVRŠNI RAD	SAILING BOAT L5-CLASS
-------------	-----------------------

Stability Index (STIX):		complete both columns				
Factor	Item	Symbol	Unit	m <sub>MO</sub>	m <sub>LA</sub>	Ref.
<b>FDS</b> (6.6.2)	Positive area under GZ curve to $\Phi_V$	$A_{GZ}$	m deg.	20,4118	16,2	6.6.2
	Length of hull	$L_H$	m	6,17		3.4.1
	Factor as calculated = $A_{GZ} / (15,81 (L_H)^{0,5})$	FDS	—	0,520	0,413	6.6.2
	FDS when limited to the range 0,5 to 1,5	FDS	—	<b>0,520</b>	<b>0,500</b>	6.6.2
<b>FIR</b> (6.6.3)	Angle of vanishing stability	$\Phi_V$		98,48	100,00	3.4.10
	If $m < 40.000$ , FIR = $\Phi_V / (125 - m / 1600)$ If $m > 40.000$ , FIR = $\Phi_V / 100$	FIR		0,792	0,806	6.6.3
	FIR when limited to the range 0,4 to 1,5	FIR		<b>0,792</b>	<b>0,806</b>	6.6.3
<b>FKR</b> (6.6.4)	Righting lever at 90° heel	$GZ_{90}$	m	0,077	0,052	6.6.4
	Reference sail area (see ISO 8666)	$A_S$	m <sup>2</sup>	21,85		3.4.8
	Height of centre of area of $A_S$ above waterline	$h_{CE}$	m	3,636	3,6	6.6.4
	Calculate $F_R = (GZ_{90} m) / (2 A_S h_{CE})$	$F_R$	—	0,528	0,495	6.6.4
	If $F_R \geq 1,5$ , FKR = $(0,875 + 0,0833 F_R)$ If $F_R < 1,5$ , FKR = $(0,5 + 0,333 F_R)$ If $\Phi_V < 90^\circ$ , FKR = 0,5	FKR	—	0,674	0,663	6.6.4
FKR when limited to the range 0,5 to 1,5	FKR	—	<b>0,674</b>	<b>0,663</b>	6.6.4	
<b>FDL</b> (6.6.5)	Length waterline	$L_{WL}$	m	5,33	5,47	3.4.2
	Length base size $L_{BS} = (2 L_{WL} + L_H) / 3$	$L_{BS}$	m	5,61	5,70	6.6.5
	Calculate $F_L = (L_{BS} / 11)^{0,2}$	$F_L$	—	0,874	0,877	6.6.5
	Calculate $FDL = \left\{ 0,6 + \left[ \frac{15mF_L}{L_{BS}^3 (333 - 8L_{BS})} \right] \right\}^{0,5}$	FDL	—	0,939	0,985	6.6.5
	FDL when limited to the range 0,75 to 1,25	FDL	—	<b>0,939</b>	<b>0,985</b>	6.6.5
<b>FBD</b> (6.6.6)	Beam of Hull	$B_H$	m	2,04		3.4.3
	Beam Waterline	$B_{WL}$	m	1,75	1,84	3.4.4
	Calculate $F_B = 3,3 B_H / (0,03 m)^{1/3}$	$F_B$	—	2,105	1,894	6.6.6
	If $F_B > 2,20$ FBD = $[13,31 B_{WL} / (B_H F_B^3)]^{0,5}$ If $F_B < 1,45$ FBD = $[B_{WL} F_B^2 / (1,682 B_H)]^{0,5}$ Otherwise FBD = $1,118 (B_{WL} / B_H)^{0,5}$	FBD	—	1,036	1,061	6.6.6
	FBD when limited to the range 0,75 to 1,25	FBD	—	<b>1,036</b>	<b>1,061</b>	6.6.6
<b>FWM</b> (6.6.7)	Downflooding angle = lesser of $\Phi_{DC}$ and $\Phi_{DH}$	$\Phi_{DW}$	degree	69,4	67,8	3.3.2
	If $\Phi_{DW} \geq 90^\circ$ (see worksheet 3) then FWM = 1,0, If $\Phi_{DW}$ is less than 90° then:					
	Righting lever at downflooding angle	$GZ_{DW}$	m	0,2508	0,1982	6.6.7
	Lever from centre of sail area to underwater profile	$h_{CE} + h_{LP}$	m	4	4	6.6.7
	Calc. wind speed at which serious flooding occurs = $\{13 m GZ_{DW} / [A_S (h_{CE} + h_{LP}) \cos \Phi_{DW}]^{1,3}\}^{0,5}$	$v_{AW}$	m / s	12,6	12,5	6.6.7
	If $\Phi_{DW} < 90^\circ$ , FWM = $v_{AW} / 17$ ; if $\Phi_{DW} \geq 90^\circ$ , FWM = 1,0	FWM	—	0,740	0,736	6.6.7
FWM when limited to the range 0,5 to 1,0	FWM	—	<b>0,740</b>	<b>0,736</b>	6.6.7	

to be continued on worksheet 7b

**ISO 12217-2:2017 CALCULATION WORKSHEET No. 7b (continued)**
**STABILITY INDEX**
**ZAVRŠNI RAD SAILING BOAT L5-CLASS**
**Stability Index (STIX):**
**complete both columns**

Factor	Item	Symbol	Unit	$m_{MO}$	$m_{LA}$	Ref.
<b>FDF (6.6.8)</b>	Downflooding angle to non-quickdraining cockpit	$\Phi_{DC}$	degree	69,4	67,8	3.3.2
	Downflooding angle to main access hatch	$\Phi_{DH}$	degree	69,4	67,8	3.3.2
	Total area of openings for findig $\Phi_{DA} = (1,2 L_H B_H F_M)$		cm <sup>2</sup>	0,000		3.3.2
	Downflooding angle at which above area is immersed	$\Phi_{DA}$	degree			3.3.3
	Angle of vanishing stability	$\Phi_V$	degree	98,5	100,0	3.4.10
	Least of the above four angles	$\Phi_{DF}$	degree	69,4	67,8	6.6.8
	Then $FDF_1 = \Phi_{DF} / 90$			0,77	0,75	6.6.8
	FDF <sub>1</sub> when limited to the range 0,5 to 1,25	FDF <sub>1</sub>		0,77	0,75	6.6.8
	Does boat float acc. to 6.5.2.b) and also when flooded have $GZ_{90} > 0$ ?		Yes / No	No	No	6.6.8
	If Yes, calculate final FDF = 1,2 FDF <sub>1</sub> , otherwise FDF = FDF <sub>1</sub>	FDF		0,77	0,75	6.6.8

**Calculation of STIX and assignment of Design Category:**

Item	Symbol	Unit	$m_{MO}$	$m_{LA}$	Ref.
Length base size $L_{BS} = (2 L_{WL} + L_H) / 3$	$L_{BS}$	m	5,610	5,701	6.6.9
Product of all 7 factors = FDS x FIR x FKR x FDL x FBD x FWM x FDF	$F$	—	0,154	0,155	
$STIX = (7 + 2,25 L_{BS}) \times F^{0,5}$	$STIX$	—	7,70	7,80	
<b>Design category possible on STIX: A when <math>STIX &gt; 32</math>, B when <math>STIX &gt; 23</math>, C when <math>STIX &gt; 14</math> and D when <math>STIX &gt; 5</math></b>			D	D	Table 5

**ISO 12217-2:2017 CALCULATION WORKSHEET No. 8      KNOCKDOWN-RECOVERY TEST**

**ZAVRŠNI RAD      SAILING BOAT L5-CLASS**

**Design Categories C and D only**

method used:

Item	Symbol	Cat C	Cat D	Ref.
<b>Experimental method:</b> Crew Limit	CL			3.6.3
Is boat prepared and persons positioned as in 6.7.2 ?	Yes / No			6.7.2
Is water or other weight used instead of persons, if so which?				6.7.2
Masthead taken to		waterline	horizontal	6.7.3; 6.7.4
Masthead held in position for		60s	10s	6.7.3; 6.7.5
Boat recovers when released ?	Yes / No			6.7.3; 6.7.6
Boat floats so it can be pumped or bailed out ?	Yes / No			6.7.3; 6.7.7
<b>If boat achieves YES to each of above, Design Category is OK</b>				
<b>Alternative theoretical method:</b>				
Is GZ positive at heel angle as defined in 6.7.5 ?	Yes / No			6.7.5
<b>Design category given:</b>		<b>Fail</b>	<b>Fail</b>	

**ISO 12217-2:2017 CALCULATION WORKSHEET No. 9**
**WINDS TIFNESS TEST**
**ZAVRŠNI RAD SAILING BOAT L5-CLASS**
**Design Categories C and D using option 5 or 6 only**
**Method used: Theoretical**
**Experimental method:**

Item	Symbol	Unit	Un-reefed	Reefed	Ref.
Boat prepared and weight positioned as in 6.8.2		Yes / No			6.8.2.1
Final tension in pull-down line	$T$	kg			6.8.2.3
Perpendicular lever between pull-down and mooring lines (see fig. 5)	$h$	m			6.8.2.3
Final angle of heel observed	$\Phi_T$	degree			6.8.2.3
Beam of hull	$B_H$	m	2,04		3.4.3
Actual profile projected area of sails, including overlaps	$A'_S$	m <sup>2</sup>			3.4.9
Lever from centre of sail area to underwater profile (see fig. 6)	$h_{CE} + h_{LP}$	m			6.8.2.4
Calculated wind speed = $\sqrt{\frac{13hT + 390B_H}{A'_S(h'_{CE} + h_{LP})(\cos\phi_T)^{1,3}}}$	$v_W$	m/s	#DIV/0!	#DIV/0!	6.8.2.4
Is reefed sail plan used?		Yes / No			6.8.4.2
Design Category given according to Table 7					Table 5

**NB: Safety signs in accordance with Figure 7 must be affixed to the boat.**
**Alternative theoretical method:**

Item	Symbol	Unit	Un-reefed	Reefed	Ref.
Righting moment curve increased by one crew to windward		Yes / No	Yes		6.8.3.2
Option (from worksheet 2) being used			5		Table 2
Design Category intended			C	C	
Relevant calculation wind speed taken from Table 7	$v_W$	m/s	13,00	13,00	Table 6
Actual profile projected area of sails, including overlaps	$A'_S$	m <sup>2</sup>	21,90		3.4.9
Upright lever from centre of sail area to underwater profile (see fig. 6)	$h_{CE} + h_{LP}$	m	4,00		6.8.2.4
Calculated $0,75 v_W^2 A'_S (h'_{CE} h_{LP})$	$M_{W0}$	Nm	11103	0	6.8.2.4
From righting moment curve and wind heeling curve [= $M_{W0} (\cos\Phi)^{1,3}$ ] resulting angle of heel =	$\Phi$	degree	#N/A		6.8.3.4
Is $\Phi < \Phi_D$ (see Worksheet 3) and $< 45^\circ$ ?		Yes / No	#N/A		
Is reefed sail plan used?		Yes / No	No		6.8.4.2
Design Category given according to Table 7			#N/A		Table 5

ZAVRŠNI RAD SAILING BOAT L5-CLASS


insert curve of righting moment in 5° steps in one of following units:

<b>N m</b>	<b>kg m</b>	<b>m</b>
<b>m</b>	chosen unit	
<b>unreefed</b>	chose if reefed or unreefed sail combination used	

heeling angle[°]	insert righting Arm / Moment [Nm, kg m, m]	Righting Moment [Nm]	Righting Moment [kg m]	Righting Arm Gz [m]	Wind Heeling moment curve [N m]	Righting moment curve increased by one crew windward
0	0	0	0	0,00	11103	600
5	0,053	543	55	0,05	11048	1141
10	0,102	1.045	107	0,10	10885	1636
15	0,144	1.476	150	0,14	10614	2055
20	0,179	1.834	187	0,18	10241	2398
25	0,209	2.142	218	0,21	9770	2685
30	0,234	2.398	245	0,23	9210	2917
35	0,251	2.572	262	0,25	8567	3063
40	0,259	2.654	271	0,26	7852	3113
45	0,259	2.654	271	0,26	7076	3078
50	0,252	2.582	263	0,25	6251	2968

point of intersection of righting moment curve and wind heeling moment curve

$\Phi_c$
#N/A degree

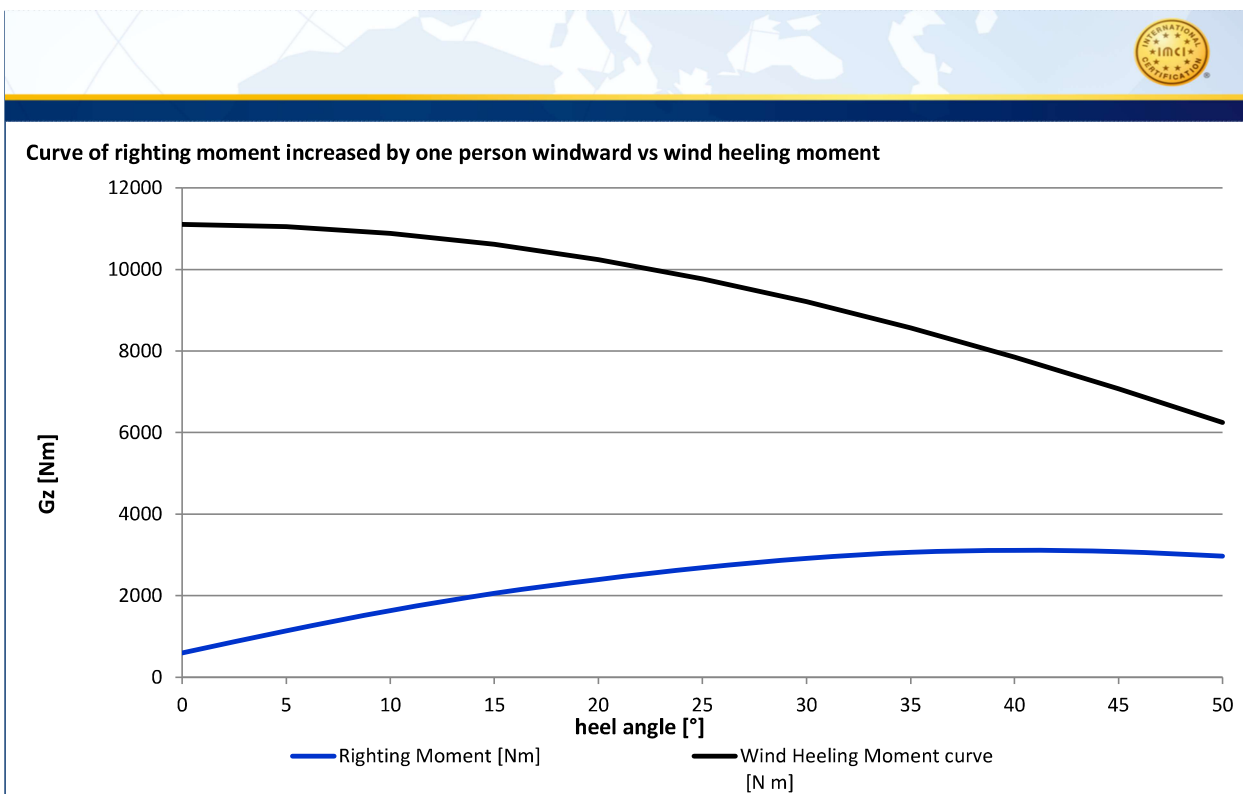



## ISO 12217-2:2017 CALCULATION WORKSHEET No. 10 FLOTATION REQUIREMENT

ZAVRŠNI RAD      SAILING BOAT L5-CLASS

### Annex D

Objective: to show that the buoyancy available from the hull structure, fittings and flotation elements equals or exceeds that required to support the loaded boat.

Item	Mass [kg]	Density [kg/m <sup>3</sup> ]	Volume [m <sup>3</sup> ]	Ref.
<b>Hull structure</b>				
GRP Laminate		1500		Table D.1
Foam core materials		80		Table D.1
Balsa core materials		150		Table D.1
Plywood		600		Table D.1
Other timber		600		Table D.1
Permanent balast		7800		Table D.1
Fastenings and other metalwork		5000		Table D.1
Windows		2300		Table D.1
<b>Engines and other fittings an equipment</b>				
Diesel engines		5000		Table D.1
Petrol engines		4000		Table D.1
Outboard engines		3000		Table D.1
Sail-drive or stern-drive		4000		Table D.1
Mast(s) and Spar(s)		2700		Table D.1
Stowed sails and ropes		1200		Table D.1
Food and other stores		2000		Table D.1
Miscellaneous equipment		2000		Table D.1
Non-integral fuel tanks				Table D.1
Non-integral water tanks				Table D.1
<b>Gross volumes of fixed tanks and air containers</b>				D.2.2
Fuel tanks				D.2.2
Water tanks				D.2.2
Other tanks				D.2.2
Air tanks or container meeting the requirement of annex E				D.2.2
<b>Total volume of hull, fittings and equipment, V<sub>B</sub> Sum</b>			0	
Mass in the maximum load condition	m <sub>LDC</sub>	kg	1517,575	3.5.5
calculate ratio m <sub>LDC</sub> / V <sub>B</sub>			#DIV/0!	
For options 4 and 6 m <sub>LDC</sub> / V <sub>B</sub> < 850 ?			#DIV/0!	

**ISO 12217-2:2017 CALCULATION WORKSHEET No.11**
**CAPSIZING-RECOVERY TEST**
**ZAVRŠNI RAD**
**SAILING BOAT L5-CLASS**
**Design Categories C and D only**

**Objective:** to demonstrate that a boat can be returned to the upright after a capsize by the actions of the crew using their body action and/or righting devices purposely designed and permanently fitted to the boat, that it will subsequently float, and to verify that the recommended minimum crew mass is sufficient for the recovery method used.

Item	Unit	Value	Ref.
Minimum number of crew required	---		6.10.7
Minimum mass of crew required	kg		6.10.7
Is boat prepared as in 6.10.2 to 6.10.5 ?	Yes / No		6.10.2-5
Does boat float for > 5 min when fully capsized ?	Yes / No		6.10.6
Time required to right the boat (least time of 1 to 3 attempts)	minutes		6.10.8
Is this time less than 5 min?	Yes / No		6.10.8
With one 75 kg person aboard, boat floats so it can be pumped or bailed out ?	Yes / No		6.10.10
With full Crew Limit aboard, without bailing, boat floats approx. level with at least 2/3 periphery showing, for more than 5 min ?	Yes / No		6.10.11
<b>INFORMATION FOR OWNER'S MANUAL:</b> Likelihood of capsize occurring in normal use:			
Righting technique which is most successful:			
Minimum number of crew required?	Minimum mass of crew required (kg):		
<b>Design category recommended by the builder:</b>		<b>C</b>	



ISO 12217-2:2017 en240408 CALCULATION WORKSHEET No.16

SUMMARY

Design Description:		ZAVRŠNI RAD SAILING BOAT L5-CLASS				
Design Category intended:		C	Crew Limit:	5	Date:	2024-09-08
Sheet	Item	Symbol	Unit	Value		
1	Length of hull: (as in ISO 8666)	$L_H$	m	6,17		
	Length of waterline	$L_{WL}$	m	5,47		
	Beam of hull: (as in ISO 8666)	$B_H$	m	2,04		
	<b>Mass:</b>					
	Empty craft mass	$m_{EC}$	kg	910		
	Maximum load	$m_L$	kg	548		
	Maximum load for the builder's plate acc to ISO 14945:2021	$m_{MBP}$	kg	510		
	Light craft condition mass	$m_{LC}$	kg	970		
	Maximum Loaded condition mass = $m_{LC} + m_{ML}$	$m_{LDC}$	kg	1518		
	Loaded arrival condition mass	$m_{LA}$	kg	1498		
Minimum operating condition mass	$m_{MO}$	kg	1090			
1	Is boat sail or non-sail?			SAIL/NON-SAIL	SAIL	
2	Option selected:				5	
		Unit	Required	Actual	Pass/Fail	
3	Downflooding openings:	Are all requirements met?			Pass	
		Watertightness test for closing appliances done successful?			Pass	
		Exemptions ok or openings considered as possible downflooding openings?			PASS	
	Downflooding angle:		Required	$m_{MO}$	$m_{LA}$	Pass/Fail
	to any opening $\Phi_{DA}$	degrees	> 35	69,4	67,8	n.a.
	to non-quickdraining opening $\Phi_{DC}$	degrees		69,4	67,8	
	to main access hatchway $\Phi_{DH}$	degrees		69,4	67,8	
3 & 4	Downflooding height:	Worksheet employed for basic height				
	basic requirement	m	0,36		0,74	Pass
	reduced height for small openings (only using figures)	m	0,27		0,74	Pass
5	<b>Recess size:</b> (option 1 using 6.5.2, and option 5,6 except cat D )					
	Simplified method: max reduction in $GM_T$	%	$\leq 0$	not used		n.a.
	Direct calculation: margin righting moment over heeling moment	N m		0		
6	Minimum righting energy: (option 1 only)	kg m degree	n.a.	22.249		n.a.
6	Angle of vanishing stability: (option 1 & 2 only)	degrees	90,0	98,48	100,00	n.a.
	Alternative to AVS (option 1 cat B only)	requirements of 6.5.2 fulfilled?				
7	Stability index: (option 1 & 2 only)	STIX	> 14	8	7,80	n.a.
8	Knockdown-recovery test: (options 3 + 4 only)	method used?		0,00		
		are all requirements met ?				n.a.

to be continued on page 2

9	<b>Wind stiffness test:</b> (options 5 & 6 only)		#N/A
	was reefed sail area used (i.e. are warning labels required?)	Yes	
10	<b>Flotation requirement:</b> options 4,6 and 8 only	ratio $m_{LDC}/V_B < 850$	
11	<b>Capsizes recovery test:</b> (option 7 only)	are all requirements met?	Yes / No
	Design category recommended by the builder		C
15	<b>Detection &amp; removal of water:</b> Are all requirements satisfied?	Yes / No	Yes
NB: Boat must pass all requirements applicable to selected option to be given intended Design Category.			
<b>Design Category given:</b>		C	Assessed by: Marija Bašić

Doc. of downflooding opening / closing appliance attached?

If applicable, cockpit calculation according to ISO 11812 attached ?

If applicable, curve of righting moments in  $m_{MO}$  and  $m_{LA}$  attached ?

Appropriate add. information attached (e.g. photos, drawings,...) ?

Signature: \_\_\_\_\_